


WT-A0112-J09

交指滤波器

技术指标

Serial	Parameters	
1	Frequency Range	2900~3650MHz
2	Center Frequency	3275MHz
3	Bandwidth	750MHz
4	Insertion Loss	≤0.8dB
5	VSWR	≤1.5
6	Rejection	≥60dB@ 2475MHz ≥60dB@ 4075MHz
7	Surface Finish	Black Paint
8	Connectors	SMA-Female
9	Net Weight	0.07 KG
10	Configuration	As Below

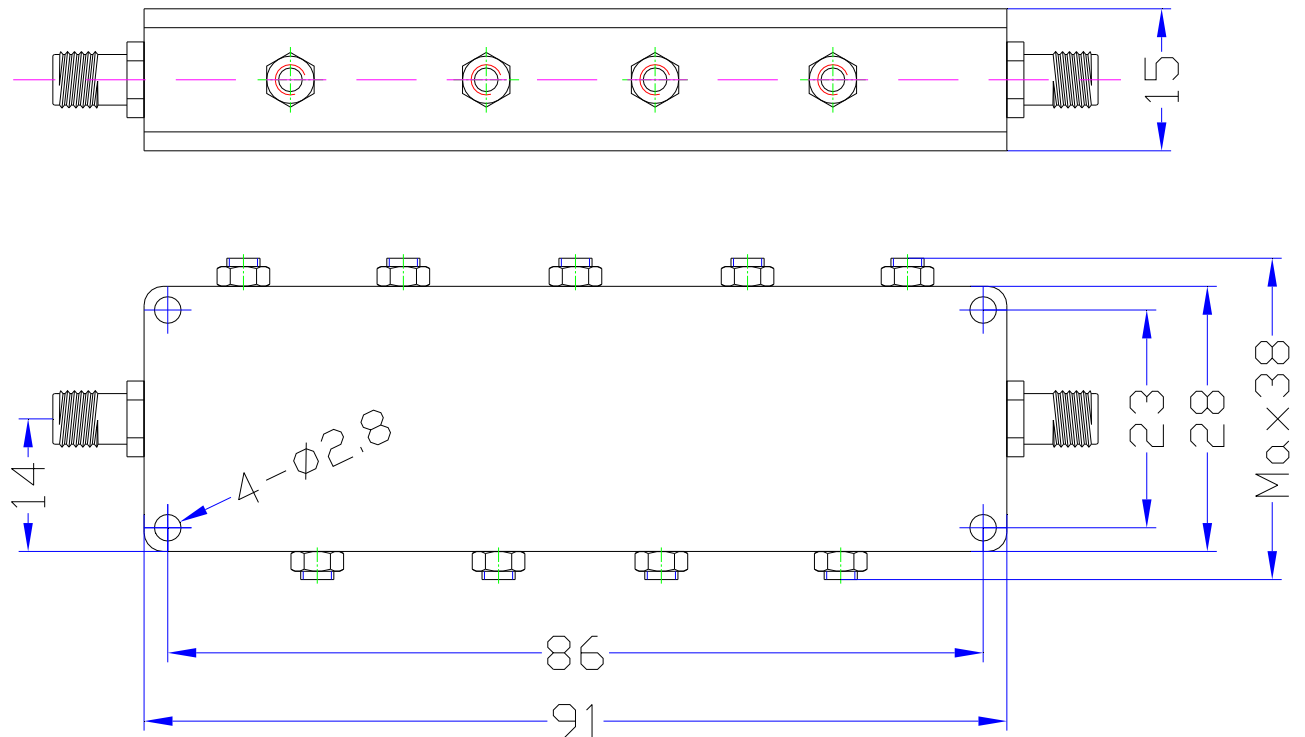

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市建设路 43 号 610051

Add:No.43,Jianshe Road,Chengdu.China Zip Code:610051