


WT-A0129-Q10

腔体滤波器

技术指标

Serial	Parameters	
1	Frequency Range	1850~1910MHz, F0=1880MHz
2	Insertion Loss	≤2.0dB
3	Return Loss	≥16dB
4	Rejection	≥80dB@ DC~1830MHz ≥80dB@ 1930~2500MHz ≥60dB@ 2500~6000MHz
5	Surface Finish	Black Paint
6	Connectors	N-Female
7	Configuration	As Below

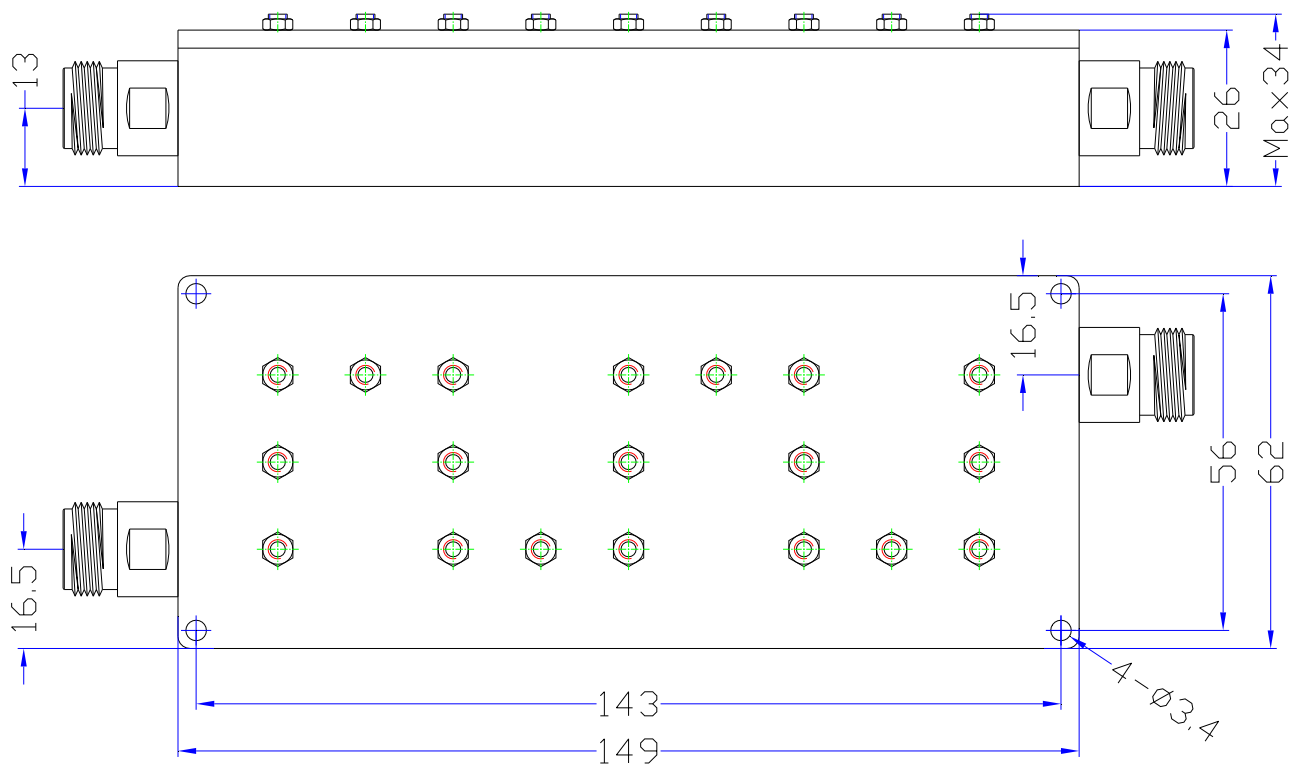

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041