


WT-A0172-Q06

腔体滤波器

技术指标

Serial	Parameters	
1	Frequency Range	2570~2620MHz
2	Insertion Loss	≤1.0dB
3	Return Loss	≥14dB
4	Rejection	≥40dB@ 9KHz~2545MHz ≥40dB@ 2645~3000MHz
5	Power Handling	40Watt average 1000Watt peak@PASSBAND
6	Surface Finish	Black Paint
7	Connectors	N-Female
8	Configuration	As Below

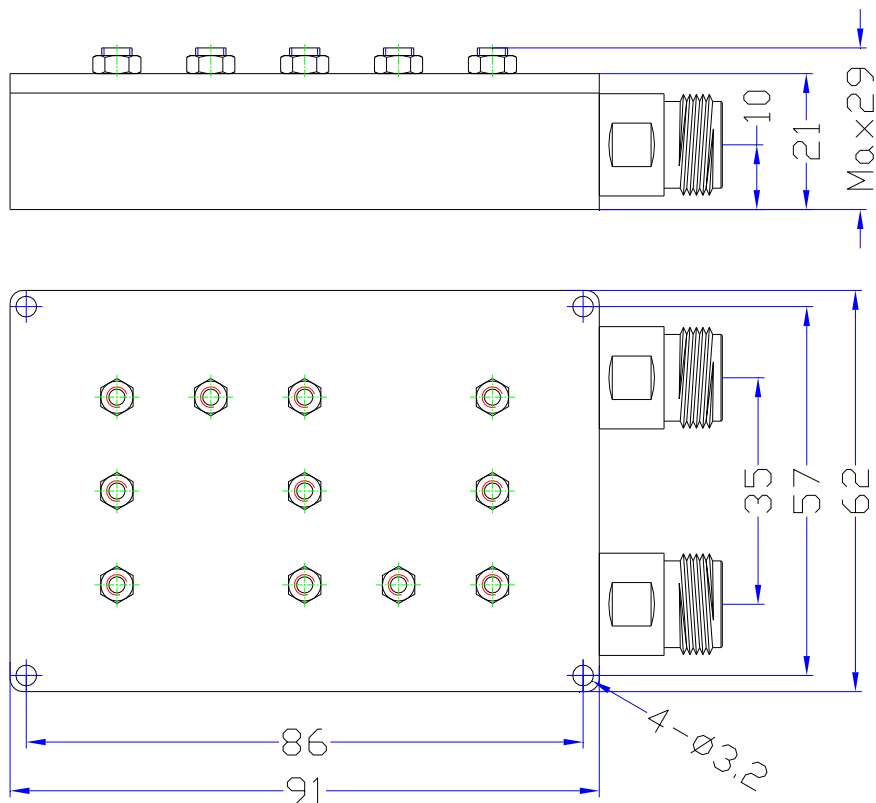

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,GuiXi Road,Chengdu 610041,China Zip Code:610041