
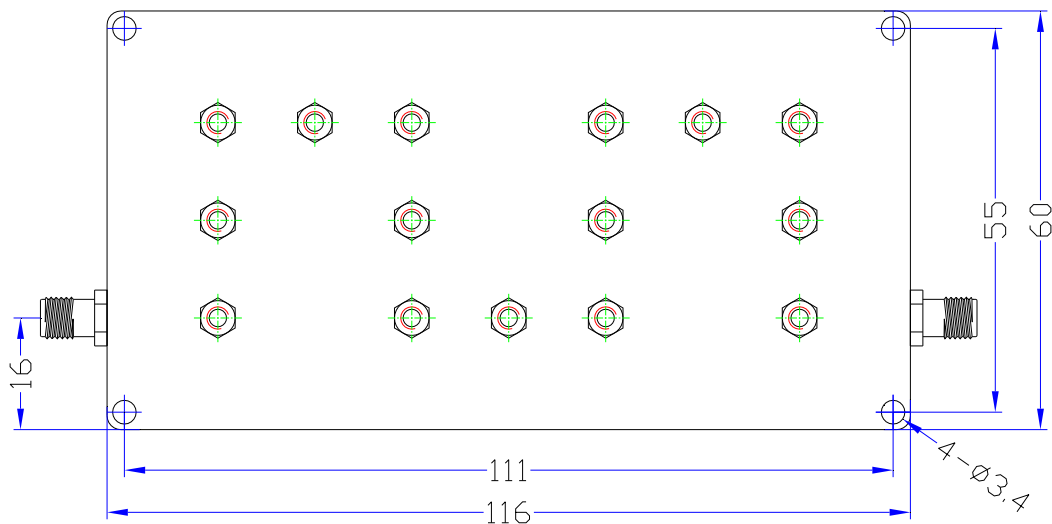


# WT-A0193-Q08

## 腔体滤波器

### 技术指标

Serial	Parameters	
1	Passband Frequency	1476~1511MHz
2	Insertion Loss	$\leq 2.0\text{dB}$
3	VSWR	$\leq 1.3:1$
4	Rejection	$\geq 52\text{dB @ DC}\sim 1458\text{MHz}$ $\geq 52\text{dB @ } 1529\sim 4000\text{MHz}$
5	Surface Finish	Black Paint
6	Port Connectors	SMA-Female
7	Configuration	As Below

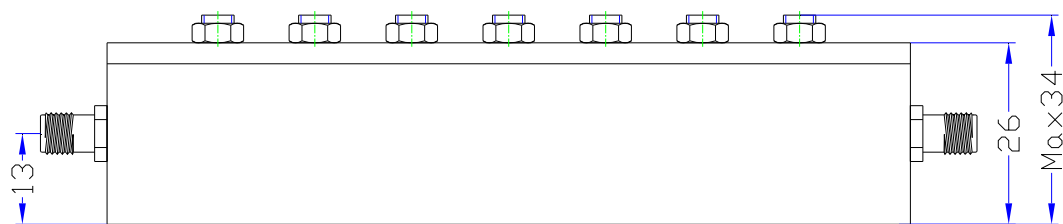

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041

第4页 共4页