
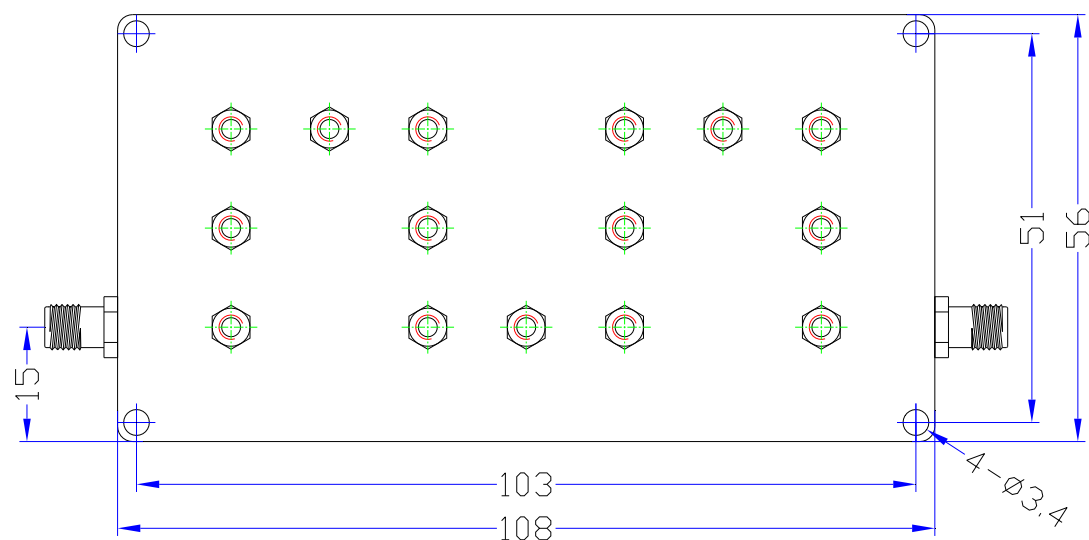


# WT-A0196-Q08

## 腔体滤波器

### 技术指标

Serial	Parameters	
1	Passband Frequency	2110~2170MHz
2	Insertion Loss	≤2.0dB
3	VSWR	≤1.3:1
4	Rejection	≥52dB @ DC~2080MHz ≥52dB @ 2200~4000MHz
5	Surface Finish	Black Paint
6	Port Connectors	SMA-Female
7	Net Weight	0.245 KG
8	Configuration	As Below

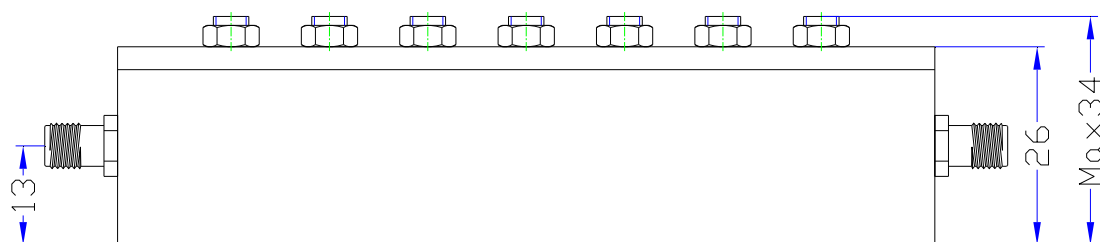

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051

ADD: 11F-1108, Building#1, NO.37, Jiancai Road, Chengdu 610051, China. Zip Code:610051