


WT-A0302-S07

梳状滤波器

技术指标

Serial	Parameters	
1	Frequency Range	7700~8700MHz
2	Insertion Loss	≤0.7dB
3	VSWR	≤1.5:1
4	Rejection	≥70dB @ 5000MHz ≥70dB @ 11000MHz
5	Port Connectors	SMA-Female
6	Surface Finish	The Original Silver Color
7	Configuration	As Below

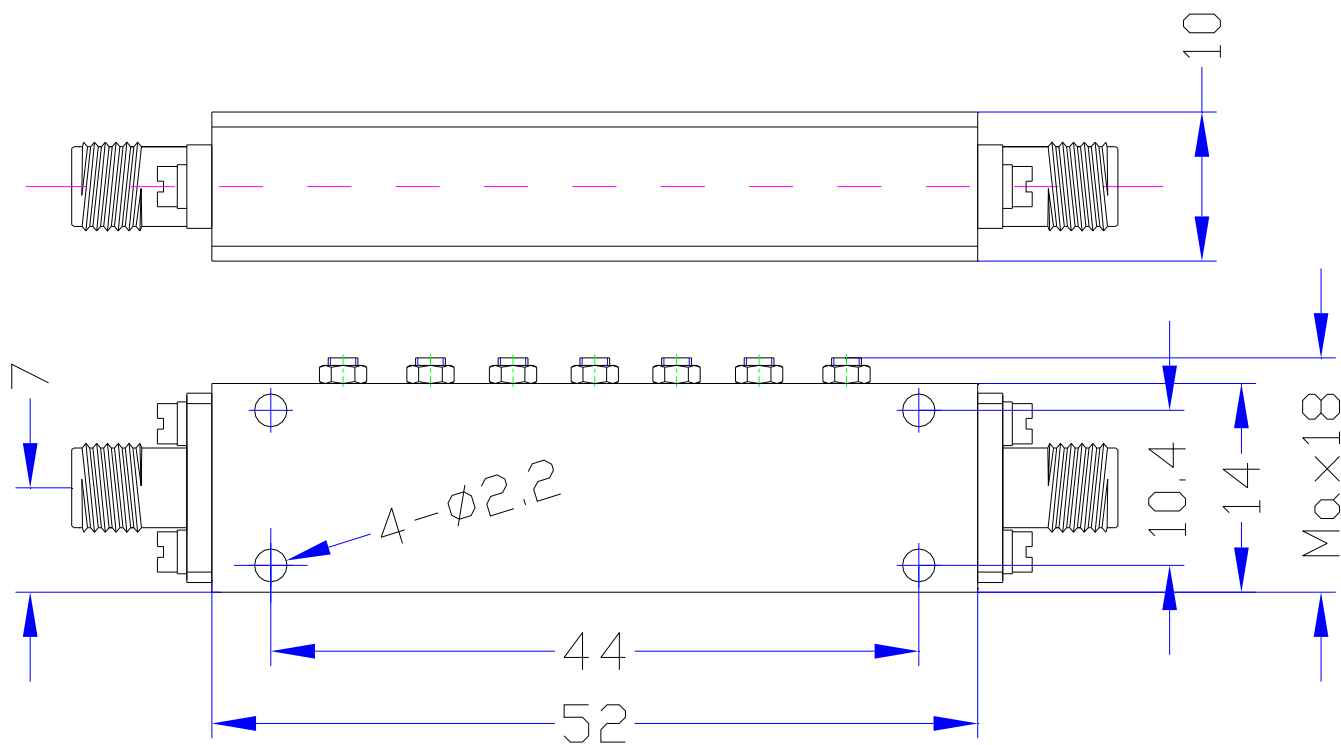

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd
<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com
 TEL:+86-028-84300332 FAX:+86-028-84300332
 地址:中国 成都市高新区桂溪路 223 号 610041
 Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041
 第4页 共4页