


WT-A0310-Q04

腔体滤波器

技术指标

Serial	Parameters	
1	Frequency Range	2695~2755MHz
2	Insertion Loss	≤1.0dB
3	Ripple	≤0.25dB
4	VSWR	≤1.4:1
5	Rejection	≥50dB @ 2600MHz
6	Impedance	50 Ohm
7	Port Connectors	SMA-Female
8	Surface Finish	Black Paint
9	Configuration	As Below

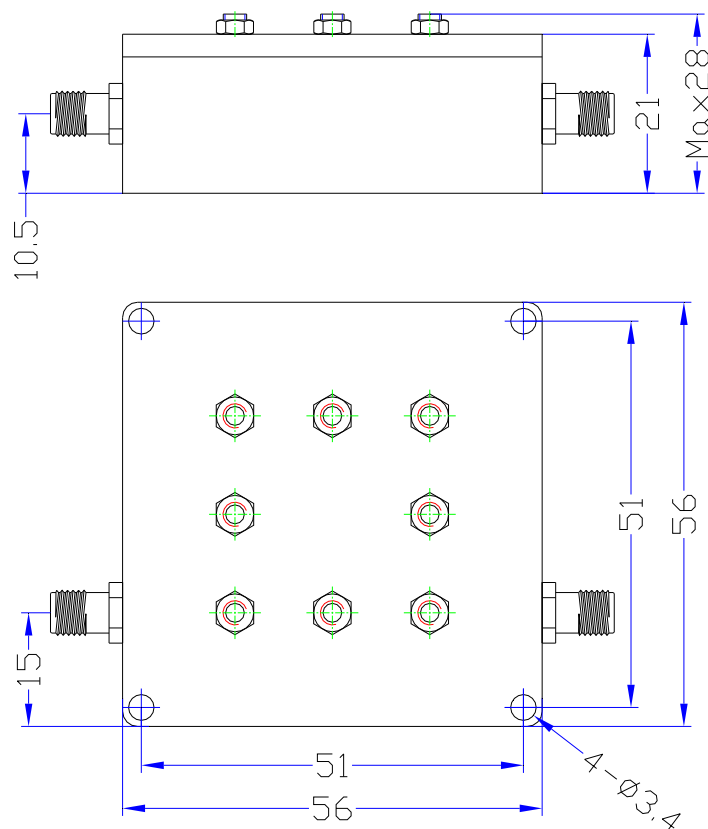

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041