


WT-A0541-Q08

腔体滤波器

技术指标

Serial	Parameters	
1	Frequency Range	1880~1980MHz (F0=1930MHz)
2	Insertion Loss	≤0.8dB
3	VSWR	≤1.2:1
4	Rejection	≥60dB @ 1805~1850MHz
5	Port Connectors	SMA-Female
6	Power Handling	≤100W
7	Operating Temperature	-35℃~+70℃
8	Surface Finish	Black Paint
9	Configuration	As Below (Size Unit: mm)

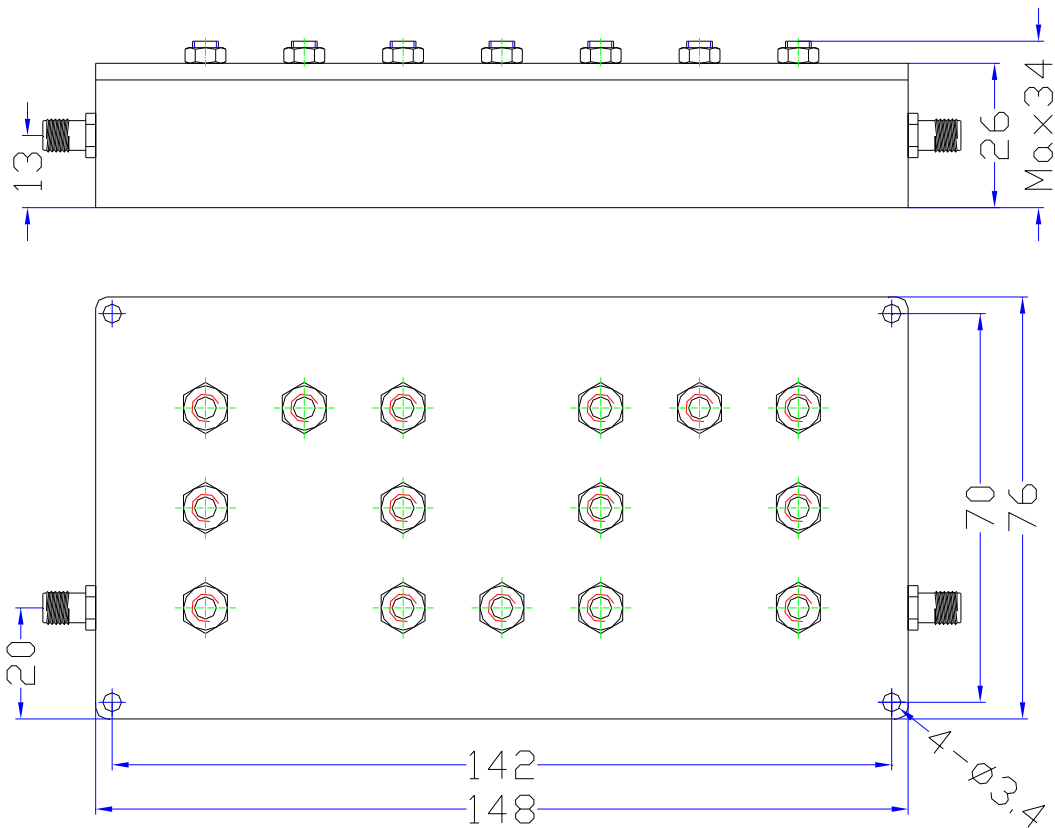

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041