


WT-A0556-Q11

腔体滤波器

技术指标

Serial	Parameters	
1	Frequency Range	9000~9500MHz (F0=9250MHz)
2	Insertion Loss @ Center Frequency	≤1.3dB @ 9250MHz
3	VSWR	≤1.5:1
4	Rejection	≥65dB @ 8790MHz ≥65dB @ 9700MHz
5	Port Connectors	SMA-Female
6	Operating Temperature	-40℃~+80℃
7	Surface Finish	The Original Silver Color
8	Configuration	As Below (Size Unit: mm)

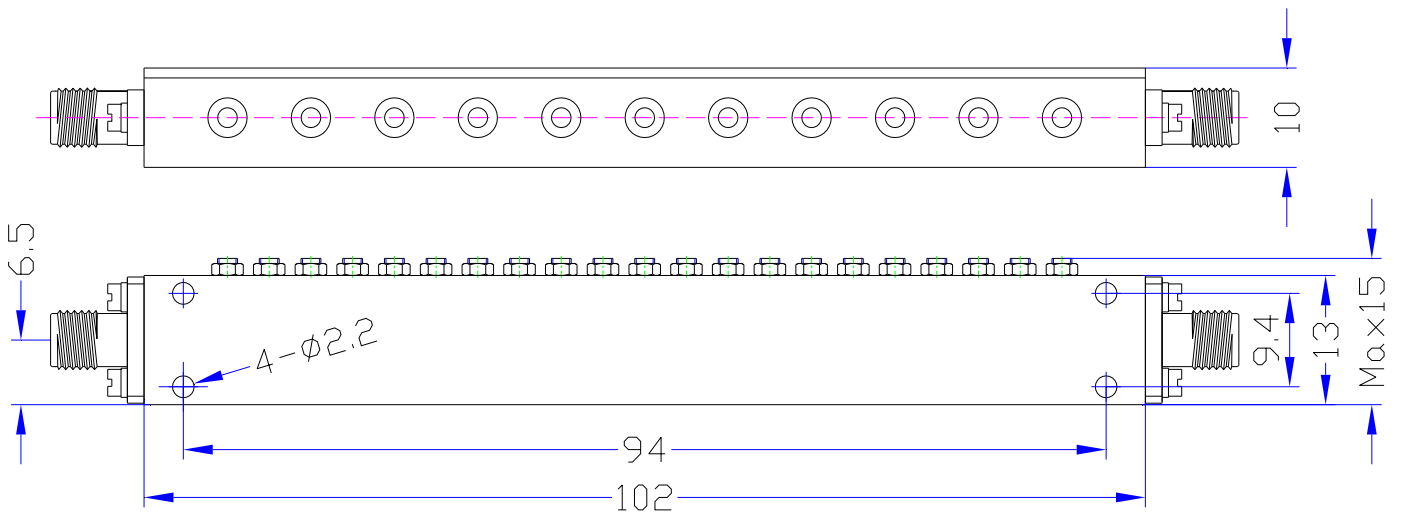

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041