


WT-A1067-Q12

腔体滤波器

技术指标

Serial	Parameters	
1	Frequency Range	1880~1920MHz
2	Insertion Loss	≤3.0dB
3	VSWR	≤1.3:1
4	Rejection	≥70dB @ DC~1870MHz ≥70dB @ 1930~3000MHz
5	Impedance	50 ohms
6	Power Handling	50W
7	Surface Finish	Black Paint
8	Connectors	N-Female
9	Configuration	As Below (Size Unit: mm)

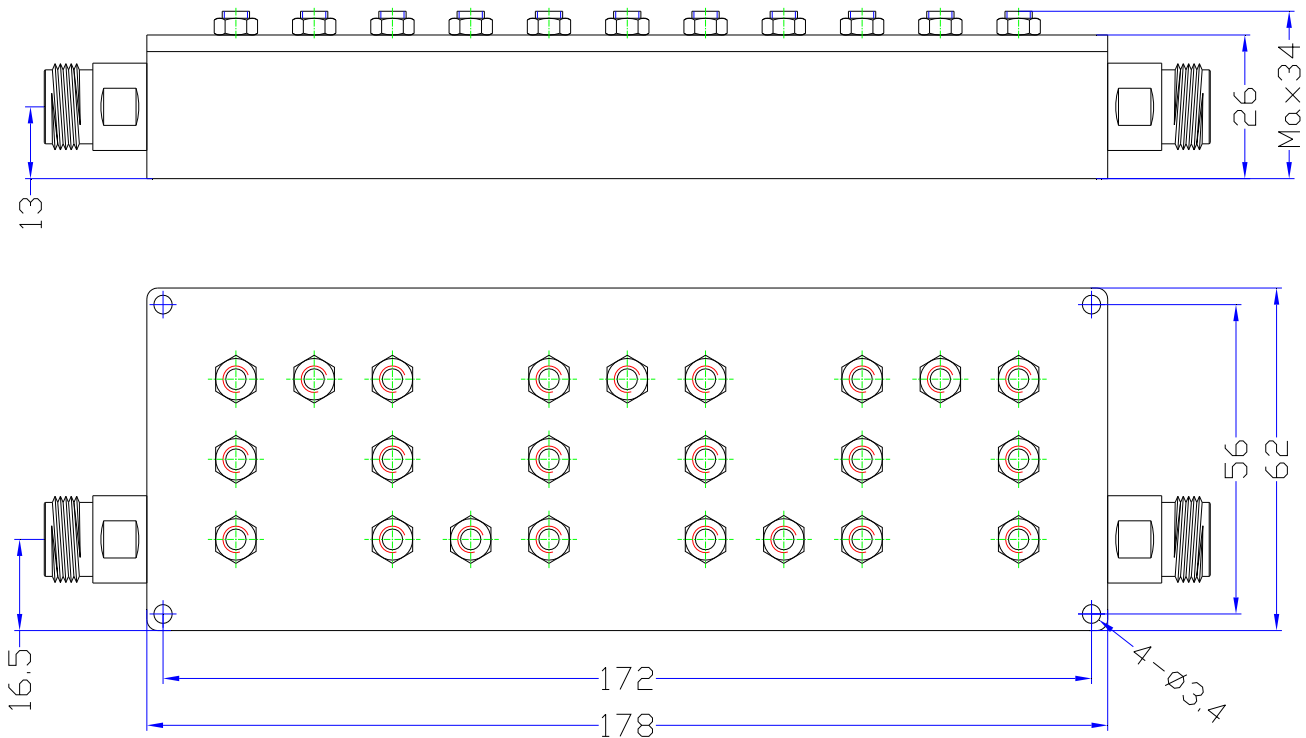

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd
<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com
 TEL:+86-028-84300332 FAX:+86-028-84300332
 地址:中国 成都市高新区桂溪路 223 号 610041
 Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041