


WT-A1169-J09

交指滤波器

技术指标

Serial	Parameters	
1	1dB Pass Band Frequency	1.63~2.43GHz (F0=2.03GHz)
2	Insertion Loss	≤1.0dB
3	VSWR	≤1.5:1
4	Rejection	≥25dBc @ 1.4GHz ≥25dBc @ 2.66GHz ≥40dBc @ 2.8~4.03GHz
5	Port Connectors	SMA-Female
6	Impedance	50 ohms
7	Surface Finish	The Original Silver Color
8	Configuration	As Below (Size Unit: mm)

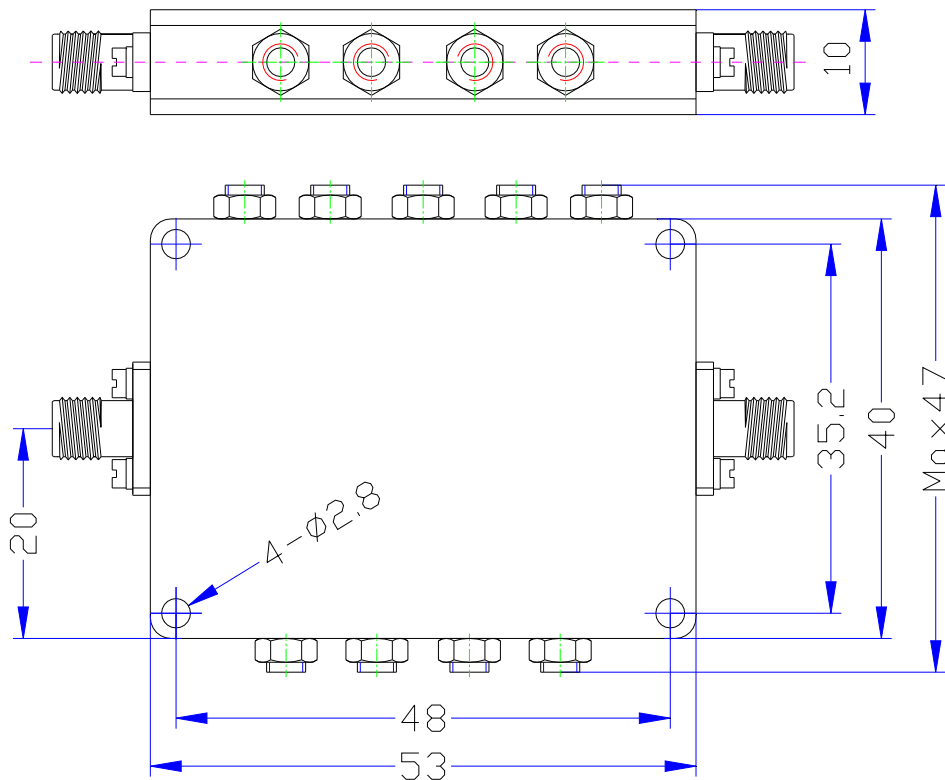

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd
<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com
 TEL:+86-028-84300332 FAX:+86-028-84300332
 地址:中国 成都市高新区桂溪路 223 号 610041
 Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041