


WT-A1171-J09

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	3.06GHz
2	1dB Pass Band Frequency	2.66~3.46GHz
3	Insertion Loss	≤1.0dB
4	VSWR	≤1.5:1
5	Rejection	≥25dBc @ 2.43GHz ≥25dBc @ 3.69GHz ≥40dBc @ 3.8~5.06GHz
6	Port Connectors	SMA-Female
7	Impedance	50 ohms
8	Surface Finish	The Original Silver Color
9	Operating Temperature	-30℃ ~ +70℃
10	Net Weight	TBD
11	Configuration	As Below (Size Unit: mm)

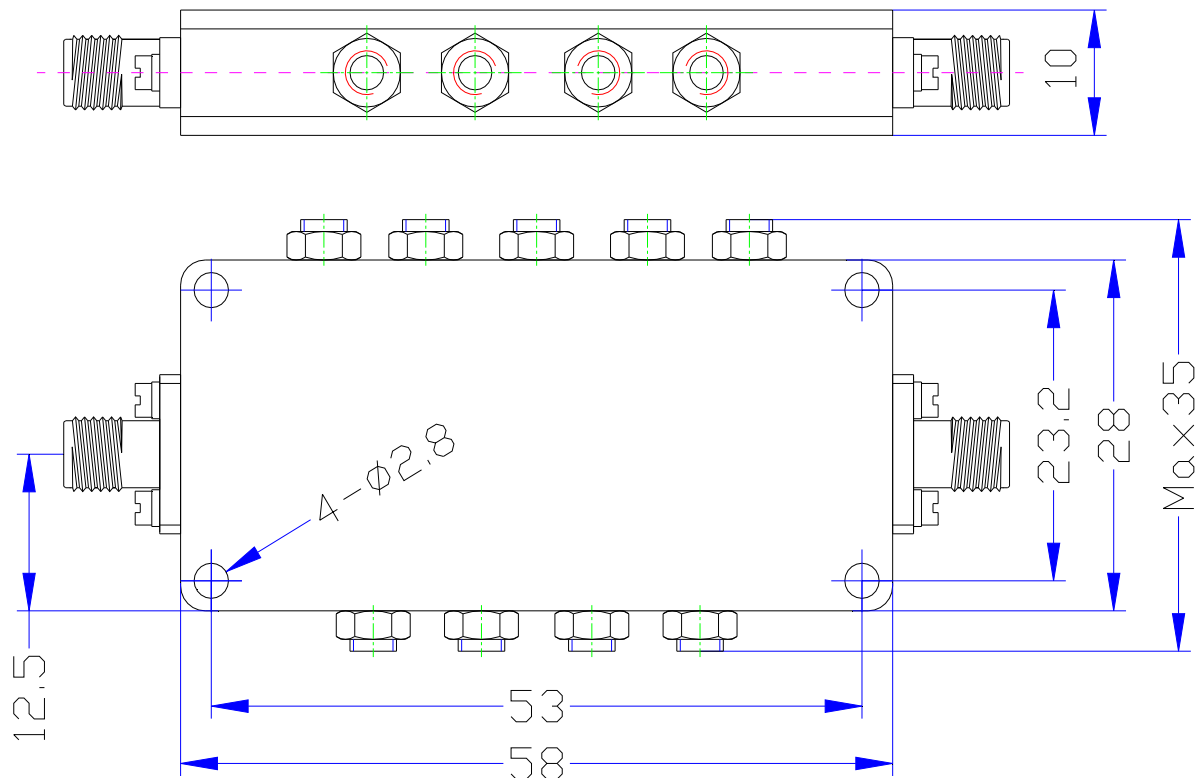

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051