


WT-A1194-S06

Comb Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	9.55GHz
2	Pass Band Width	0.955GHz (9.0725~10.0275GHz)
3	Pass Band Insertion Loss	≤0.8dB
4	Pass Band Ripple	≤0.5dB
5	Pass Band VSWR	≤1.5:1
6	Stop Band Attenuation	≥40dB @ DC~7.64GHz ≥40dB @ 11.46~16GHz
7	Impedance	50 ohms
8	Surface Finish	The Original Silver Color
9	Input Power	2W
10	Connectors	SMA-Female
11	Net Weight	0.03 KG
12	Configuration	As Below (Size Unit: mm)

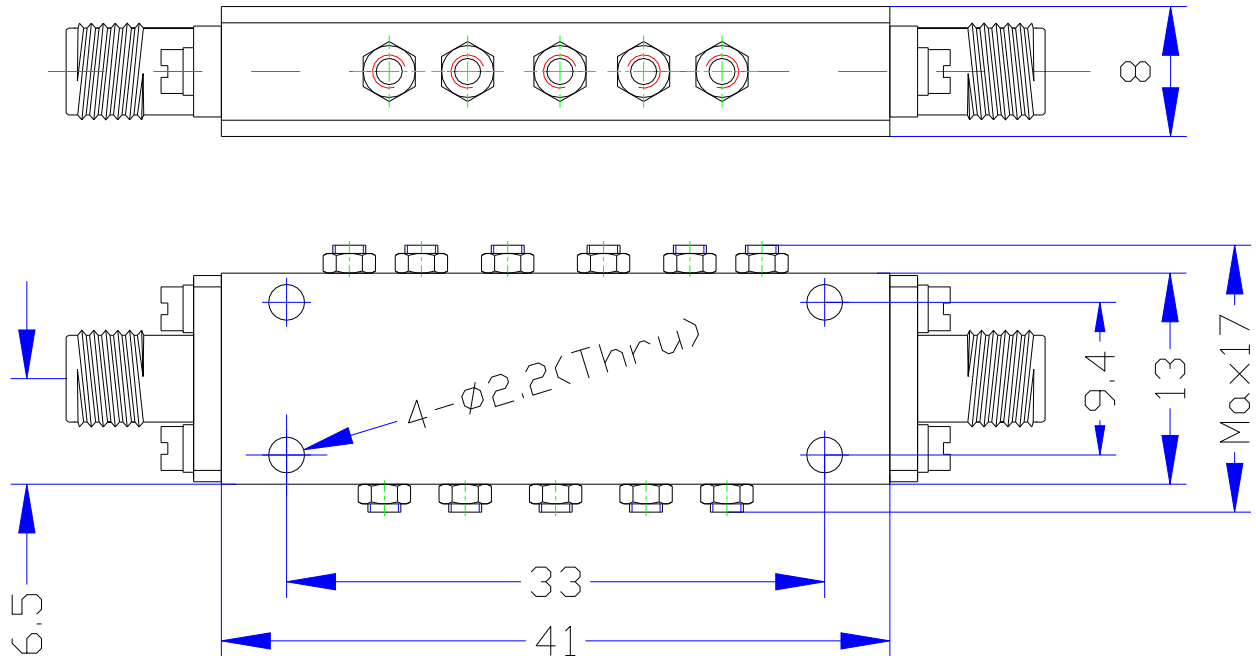

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051