


# WT-A1502-R07

## Cavity Band Rejection Filter

### Specifications

Serial	Parameters	
1	Stop Band Frequency	2400~2483MHz
2	Stop Band Attenuation	≥30dB
3	Pass Band Frequency	DC~2350MHz & 2533~6000MHz
4	Pass Band Insertion Loss	≤1.5dB
5	Pass Band Return Loss	≥14dB
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤50W
9	Connectors	SMA-Female
10	Net Weight	0.21 KG
11	Configuration	As Below (Size Unit: mm)

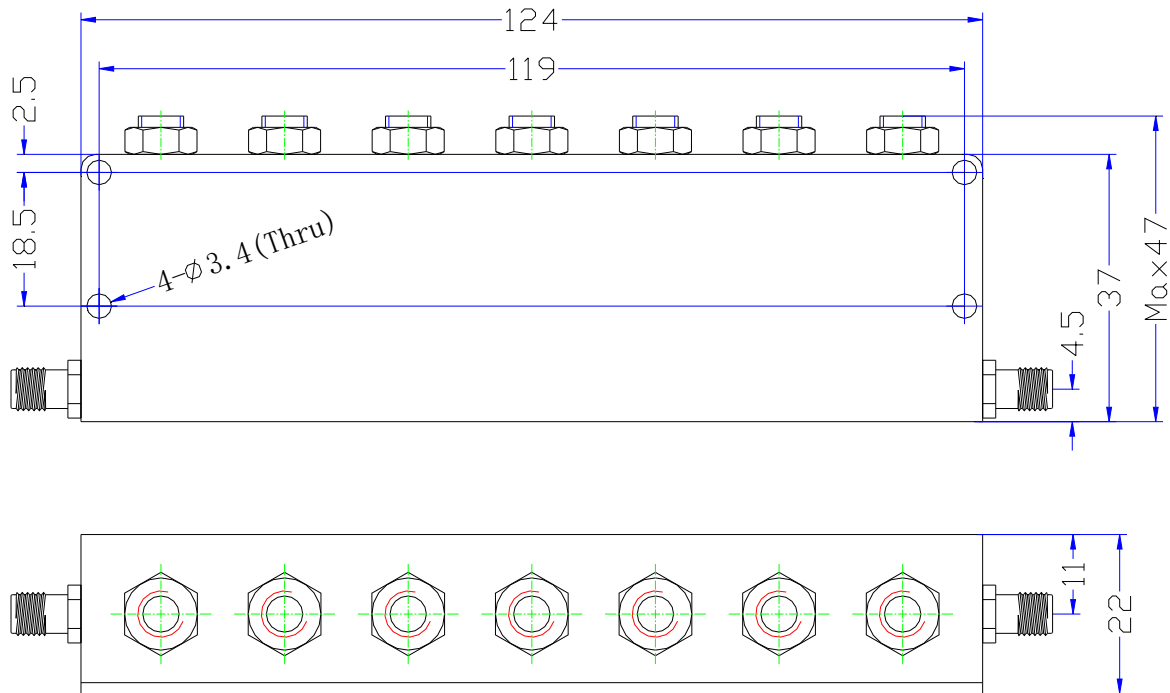

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051