WT-A1503-R06

Cavity Band Rejection Filter

Specifications
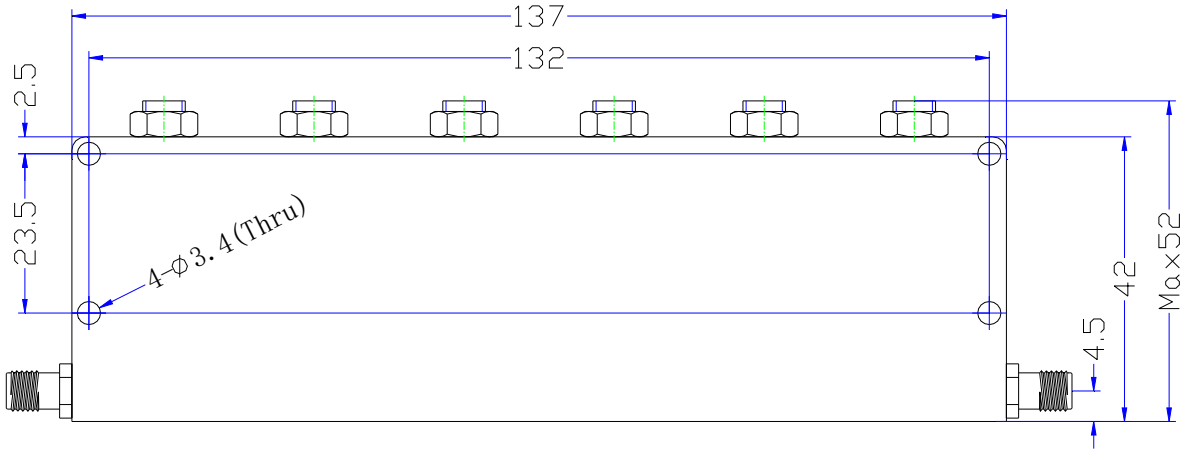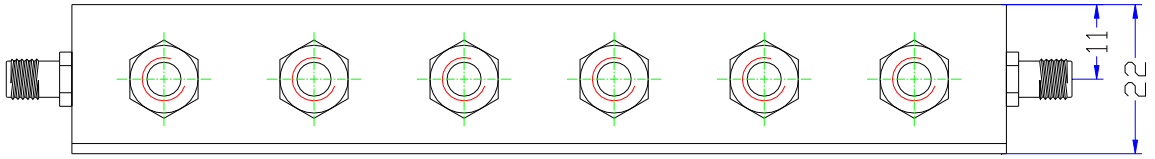
Serial	Parameters	
1	Stop Band Frequency	1880～1930MHz
2	Stop Band Attenuation	≥40dB
3	Pass Band Frequency	DC～1830MHz & 1980～4600MHz
4	Pass Band Insertion Loss	≤1.5dB
5	Pass Band Return Loss	≥14dB
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤50W
9	Connectors	SMA-Female
10	Net Weight	0.245 KG
11	Configuration	As Below (Size Unit: mm)