WT-A1848-R10

Cavity Band Rejection Filter

Specifications
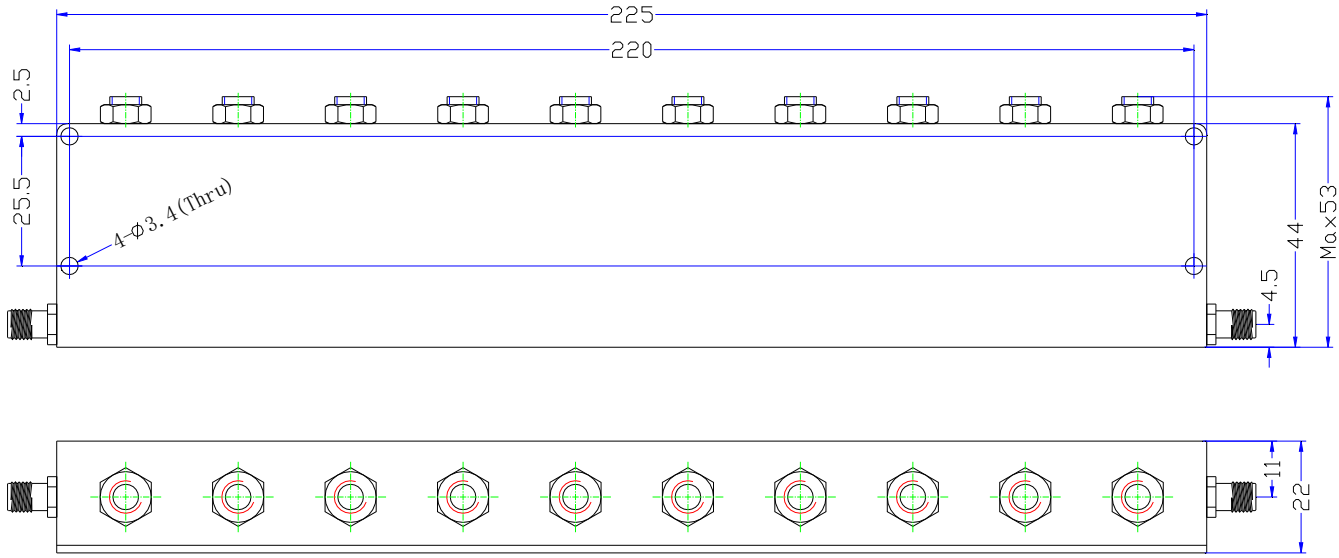
Serial	Parameters	
1	Stop Band Frequency	1805～1880MHz
2	Stop Band Attenuation	≥50dB
3	Pass Band Frequency	DC～1780MHz & 1905～5000MHz
4	Pass Band Insertion Loss	≤2.0dB
5	Pass Band VSWR	≤1.5:1
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤50W
9	Connectors	SMA-Female
10	Net weight	0.39 KG
11	Configuration	As Below (Size Unit: mm)