


WT-A1855-R12

Cavity Band Rejection Filter

Specifications

Serial	Parameters	
1	Stop Band Frequency	5460~5725MHz
2	Stop Band Attenuation	≥45dB
3	Pass Band Frequency	DC~5400MHz & 5785~8000MHz
4	Pass Band Insertion Loss	≤3.0dB
5	Pass Band VSWR	≤1.7:1
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤50W
9	Connectors	SMA-Female
10	Net Weight	0.105 KG
11	Configuration	As Below (Size Unit: mm)

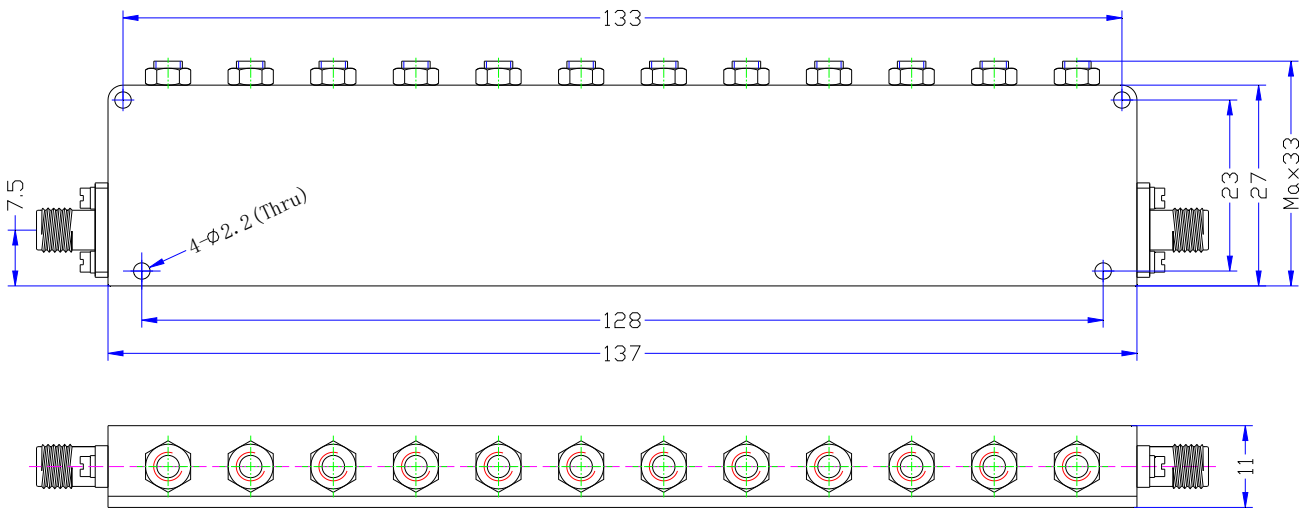

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051