


WT-A2838-Q05

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	897.5MHz
2	Pass Band Frequency	880~915MHz
3	Pass Band Insertion Loss	≤1.5dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥50dB @ F0±87.5MHz (DC~810MHz、985~2000MHz)
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤20W
9	Connectors	N-Male / N-Female
10	Net Weight	0.225 KG
11	Configuration	As Below (Size Unit: mm)

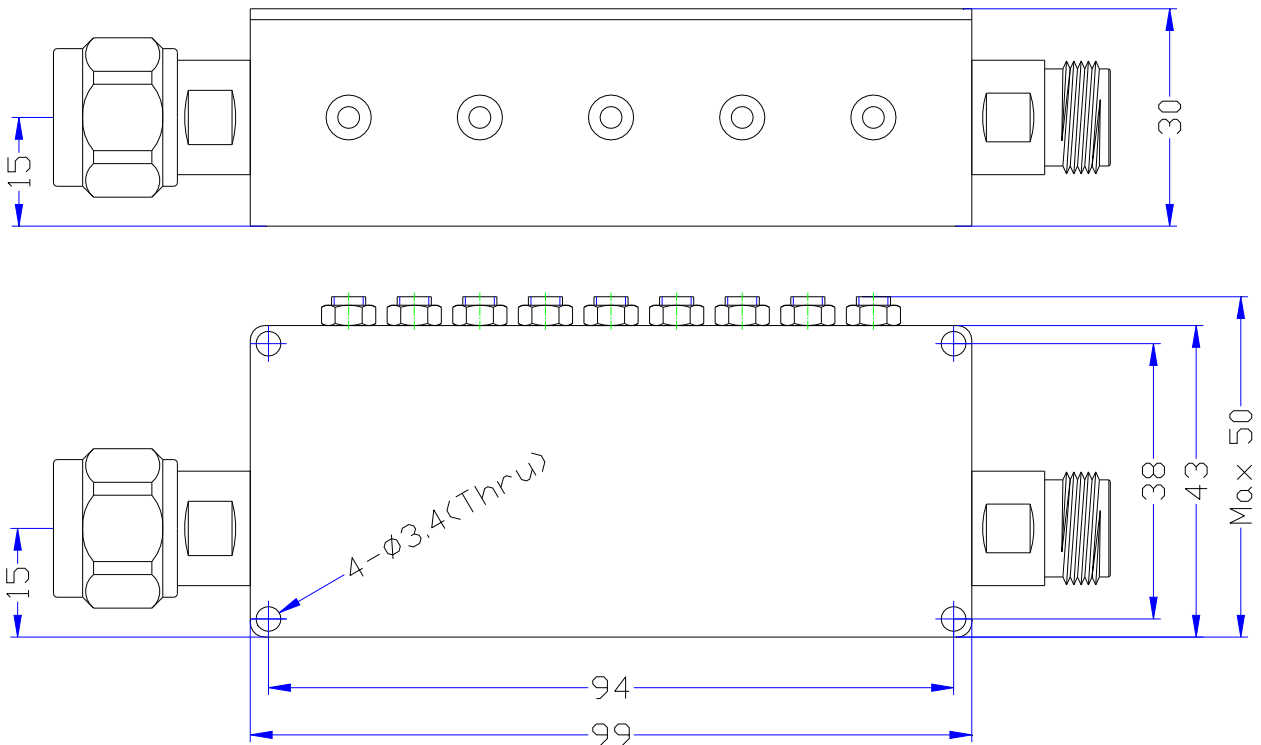

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051