


WT-A2842-Q08

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	1950MHz
2	Pass Band Frequency	1920~1980MHz
3	Pass Band Insertion Loss	≤1.5dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥50dB @ F0±70MHz (DC~1880MHz、2020~4000MHz)
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤20W
9	Connectors	N-Male / N-Female
10	Net Weight	0.29 KG
11	Configuration	As Below (Size Unit: mm)

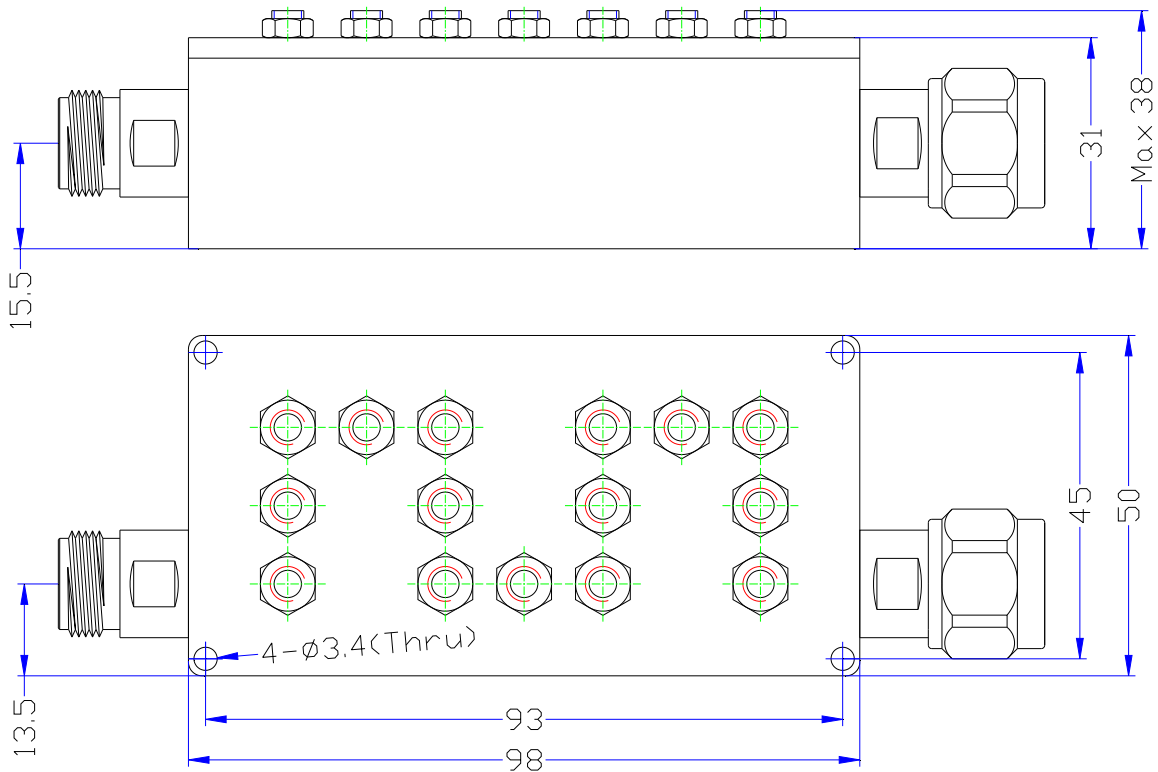

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051