


WT-A3106-Q07

腔体带通滤波器

技术指标

| Serial | Parameters | | | | |
|--------|----------------------------|---|---------|---------|---------|
| 1 | 中心频率(Center Frequency)[F0] | 9958MHz | 9820MHz | 9682MHz | 9544MHz |
| 2 | 带宽(Bandwidth) | ±35MHz | | | |
| 3 | 插入损耗(Insertion Loss) | ≤3.7dB | | | |
| 4 | 驻波比(VSWR) | ≤1.2:1 | | | |
| 5 | 带外抑制(Rejection) | ≥45dB @ F0±94MHz (注: F0为中心频率) | | | |
| 6 | 表面处理(Surface Finish) | 镀银本色或黑色烤漆 (The Original Silver Color or Black Paint) | | | |
| 7 | 阻抗(Impedance) | 50 ohms | | | |
| 8 | 功率容量(Power Handling) | ≤10W | | | |
| 9 | 接口形式(Connectors) | SMA-Female | | | |
| 10 | 净重(Net Weight) | 0.08 KG | | | |
| 11 | 外形结构图(Configuration) | As Below (Size Unit: mm) | | | |

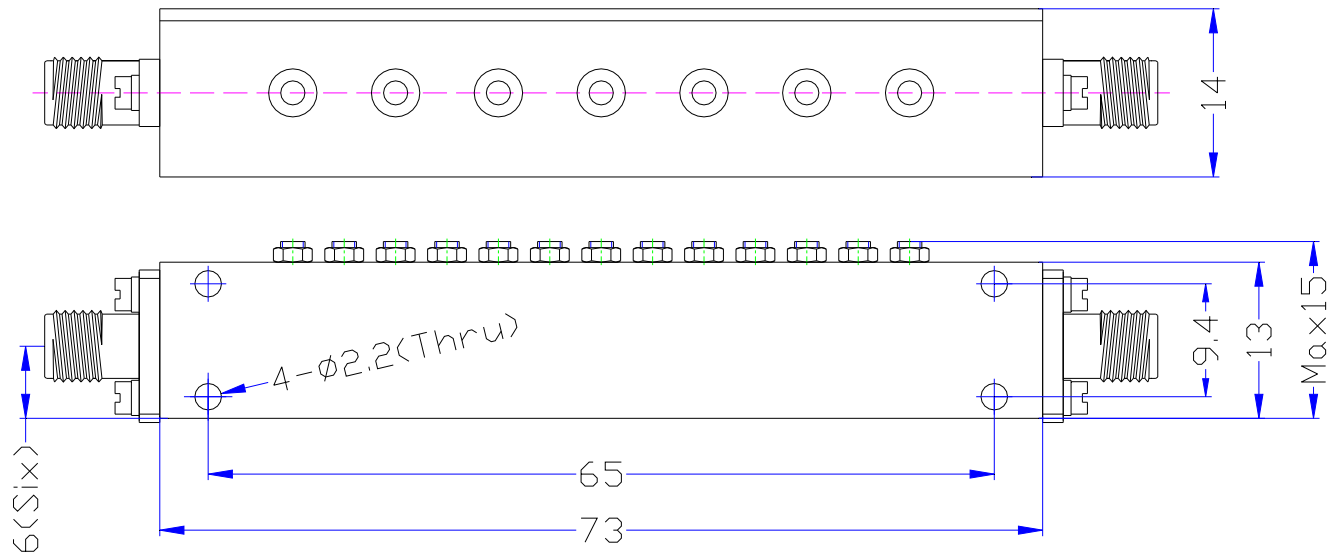

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051

ADD: 11F-1108, Building#1, NO.37, Jiancai Road, Chengdu 610051, China. Zip Code:610051

第4页 共4页