WT-A3265-LS

DC-8.5GHz Low Pass Filter

Specifications
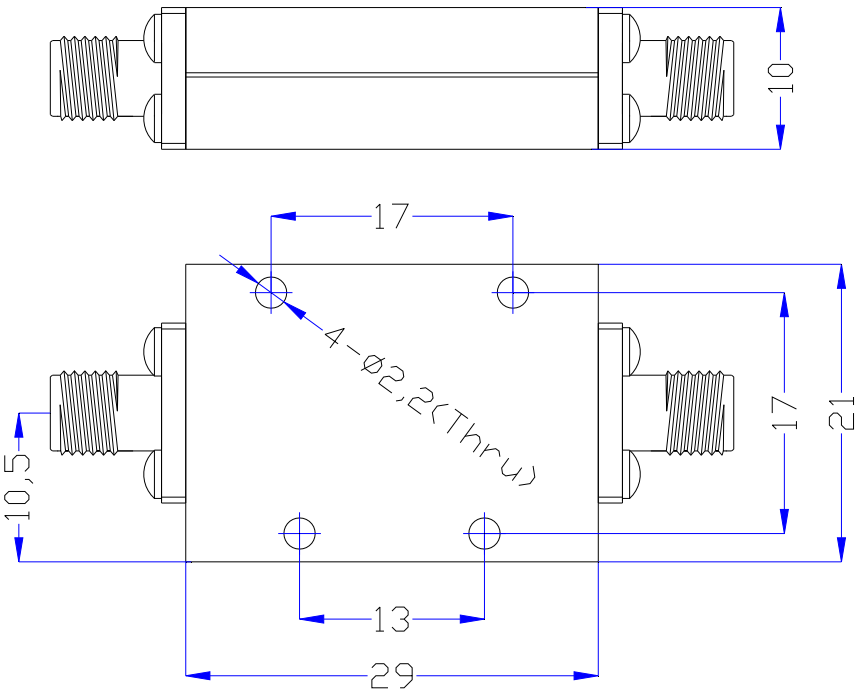
Serial	Parameters	
1	Cut Off Frequency	8.5GHz
2	Pass Band Frequency	DC～8.5GHz
3	Pass Band Insertion Loss	≤1.0dB @ DC～8.4GHz ≤1.5dB @ 8.4～8.5GHz
4	Pass Band VSWR	≤1.4:1
5	Stop Band Attenuation	≥50dB @ 9.3～17GHz
6	Impedance	50 ohms
7	Power	≤15W
8	Connectors	SMA-Female
9	Surface Finish	Guided Oxygen or Black Paint
10	Temperature Range	-55℃～+85℃
11	Net weight	0.02 KG
12	Configuration	As Below (Size Unit: mm)