


# WT-A3355-Q08

## Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	2.65GHz
2	Pass Band Frequency	2.615~2.685GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Attenuation	≥40dB @ F0 ± 50MHz (DC~2.6GHz、2.7~5.0GHz)
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤20W
9	Connectors	N-Female
10	Net Weight	0.555 KG
11	Configuration	As Below (Size Unit: mm)

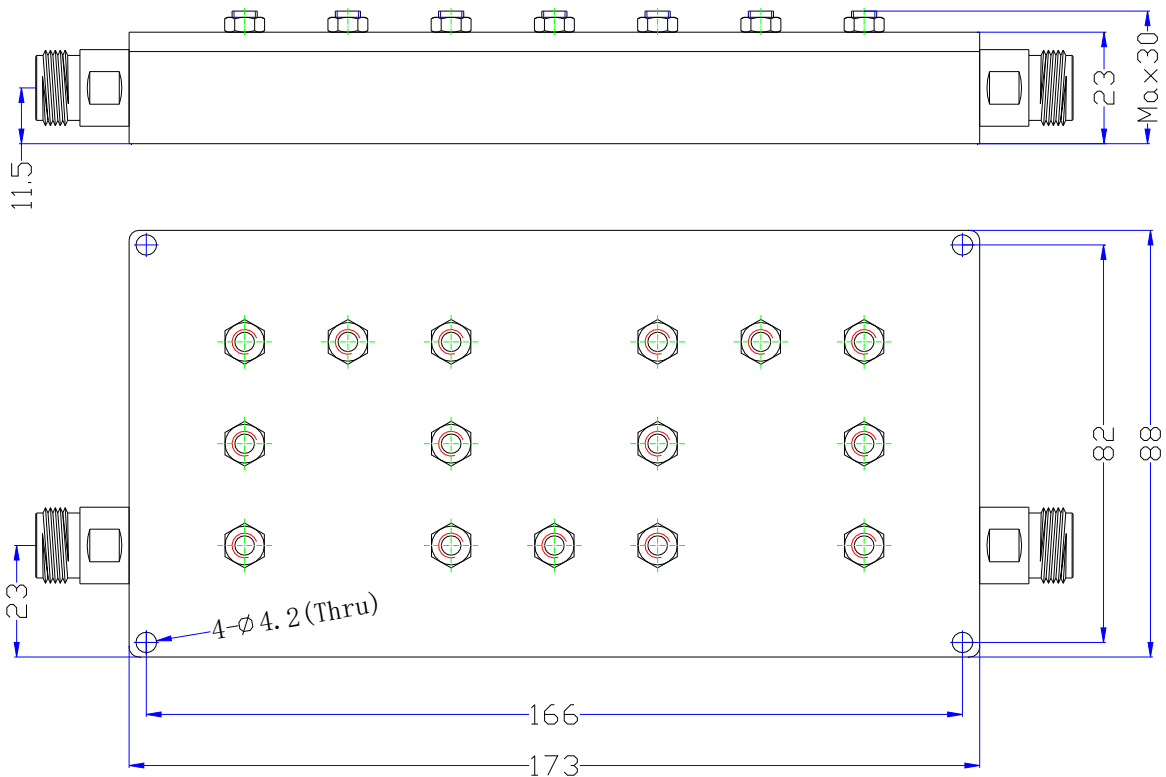

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051