


WT-A3423-S05

Comb Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	2365MHz
2	3dB Bandwidth	375MHz (2177.5~2552.5MHz)
3	Insertion Loss at F0	≤1.0dB @ 2365MHz
4	VSWR	≤1.3:1 @ 2220~2510MHz
5	Stop Band Attenuation	≥40dB @ 0~1700MHz ≥40dB @ 3000~6000MHz
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤5W
9	Connectors	SMA-Female
10	Net Weight	0.045 KG
11	Configuration	As Below (Size Unit: mm)

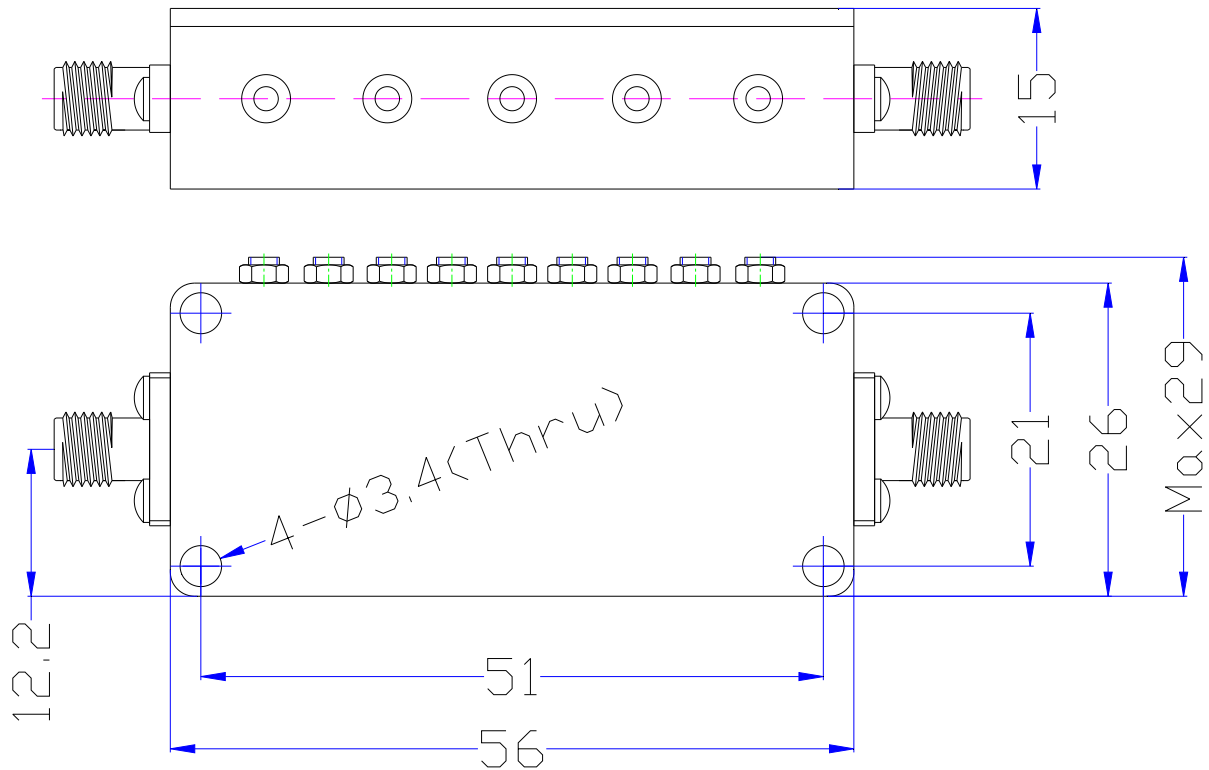

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051