


# WT-A3446-S08

## Comb Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	420MHz
2	Pass Band Bandwidth	60MHz (390~450MHz)
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band SWR	≤1.3:1
5	Stop Band Attenuation	≥40dB @ DC~350MHz ≥40dB @ 490~1000MHz
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤30W
9	Connectors	N-Female
10	Temperature Range	-40°C ~ +85°C
11	Net Weight	0.865 KG
12	Configuration	As Below (Size Unit: mm)

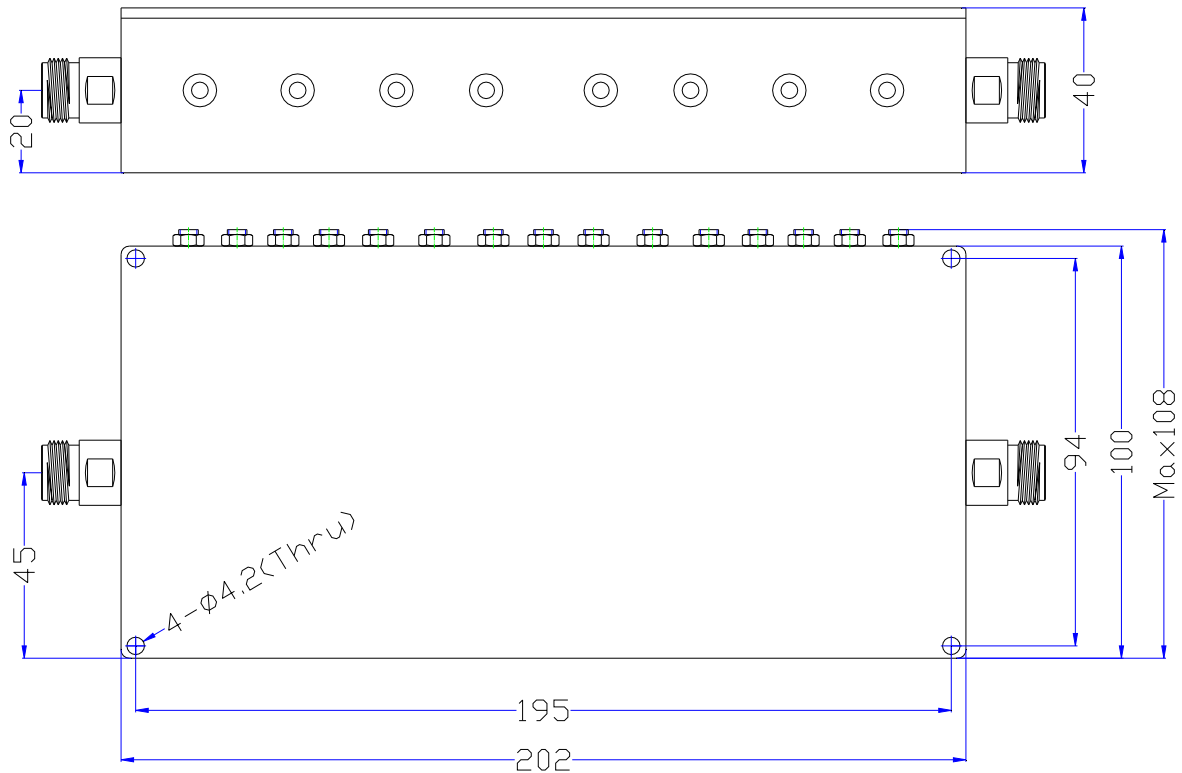

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051