


WT-A3467-Q06

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	2.45GHz
2	Pass Band Frequency	2.4~2.5GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥60dB @ 2.2GHz ≥60dB @ 5.0GHz
6	Impedance	50 ohms
7	Power Handling	CW: ≤10W ; Peak Instantaneous: ≤50W
8	Connectors	SMA-Female
9	Operating Temperature	-25°C ~ +65°C
10	Surface Finish	Black Paint
11	Net Weight	0.08 KG
12	Configuration	As Below (Size Unit: mm)

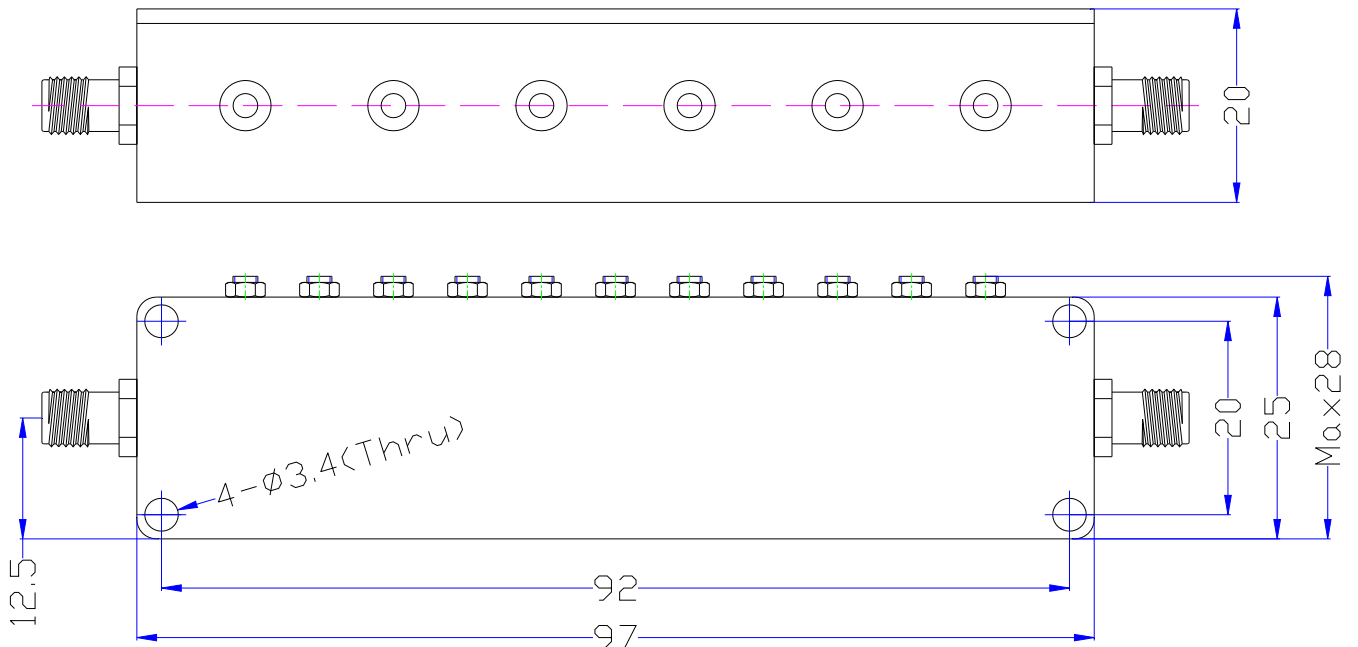

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL: +86-28-84300332/84300037 FAX: +86-28-84300332-807

Add: Chengdu of China Zip Code: 610051