


WT-A3496-J15

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	1560MHz
2	Pass Band Frequency	1400~1720MHz
3	Pass Band Insertion Loss	≤3.0dB
4	Pass Band VSWR	≤1.5:1
5	Stop Band Rejection	≥40dB @ 1350MHz ≥55dB @ 1800MHz
6	Impedance	50 ohms
7	Power Handling	≤2W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Net Weight	0.115 KG
11	Configuration	As Below (Size Unit: mm)

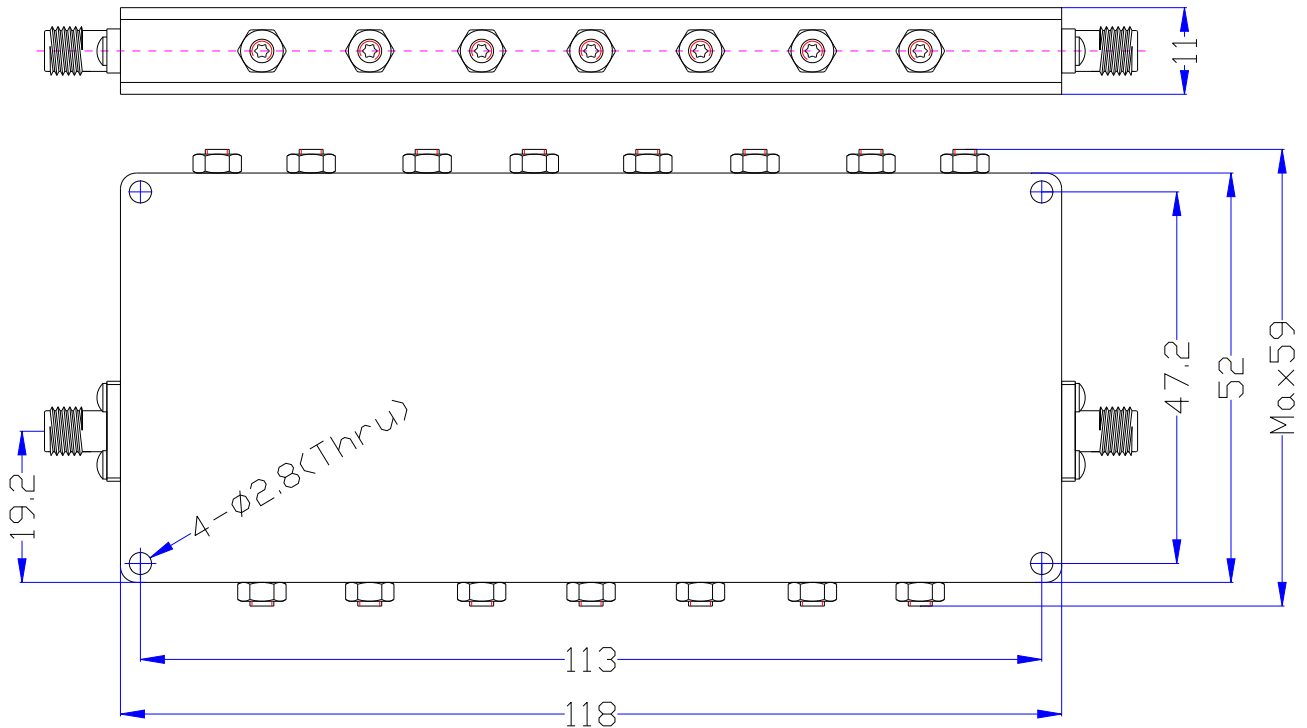

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051