


# WT-A3505-J13

## Interdigital Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	14GHz
2	Pass Band Frequency	11.99~16.01GHz
3	Pass Band Insertion Loss	≤2.0dB
4	Pass Band Ripple	≤1.5dB
5	Pass Band VSWR	≤1.7:1
6	Stop Band Rejection	≥70dB @ DC~10.2GHz
7	Impedance	50 ohms
8	Power	≤2W
9	Surface Finish	The Original Silver Color or Black Paint
10	Connectors	SMA-Female
11	Temperature Range	-40°C ~ +71°C
12	Net weight	0.035 KG
13	Configuration	As Below (Size Unit: mm)

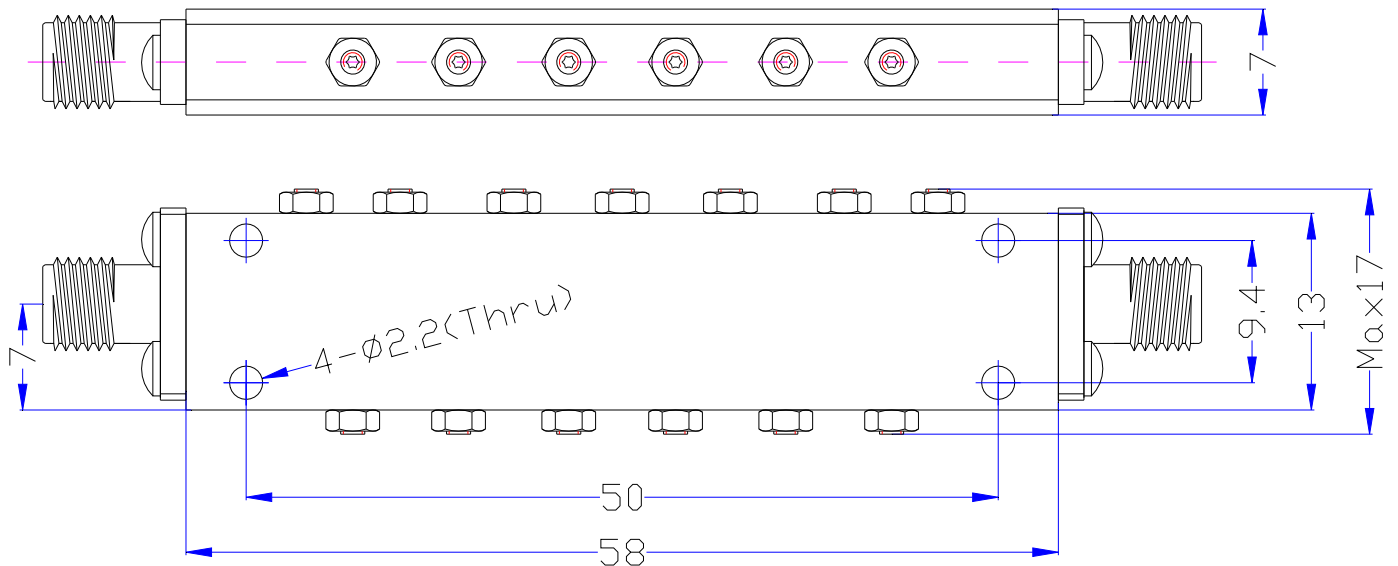

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051