


# WT-A3506-J09

## Interdigital Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	17GHz
2	Pass Band Frequency	15.99~18.01GHz
3	Pass Band Insertion Loss	≤2.0dB
4	Pass Band Ripple	≤1.0dB
5	Pass Band VSWR	≤1.7:1
6	Stop Band Rejection	≥70dB @ DC~13.6GHz
7	Impedance	50 ohms
8	Power	≤2W
9	Surface Finish	The Original Silver Color or Black Paint
10	Connectors	SMA-Female
11	Temperature Range	-40°C~+71°C
12	Net weight	0.03 KG
13	Configuration	As Below (Size Unit: mm)

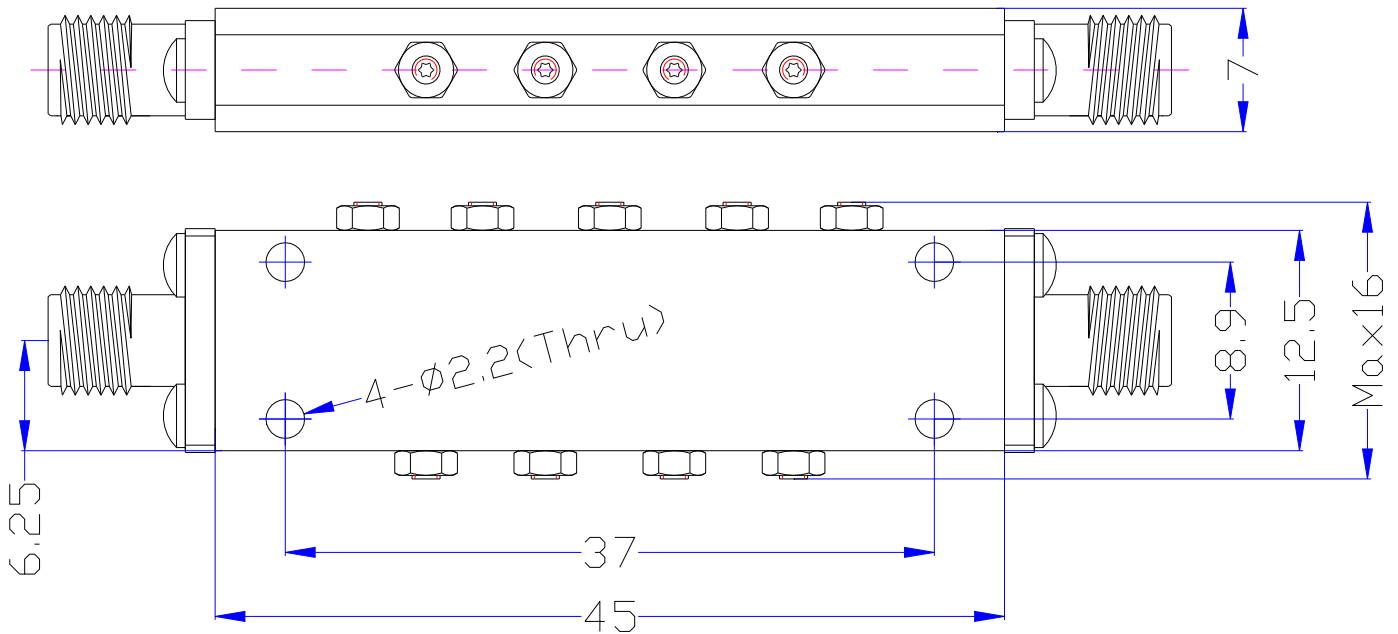

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051