


# WT-A3525-J09

## Interdigital Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	2.9985GHz
2	Bandwidth	±300MHz (2.6985~3.2985GHz)
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.5:1
5	Stop Band Attenuation	≥50dB @ F0±600MHz (DC~2.3985GHz、3.5985~5.0GHz)
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤2W
9	Connectors	N-Female / SMA-Female
10	Net Weight	0.115 KG
11	Configuration	As Below (Size Unit: mm)

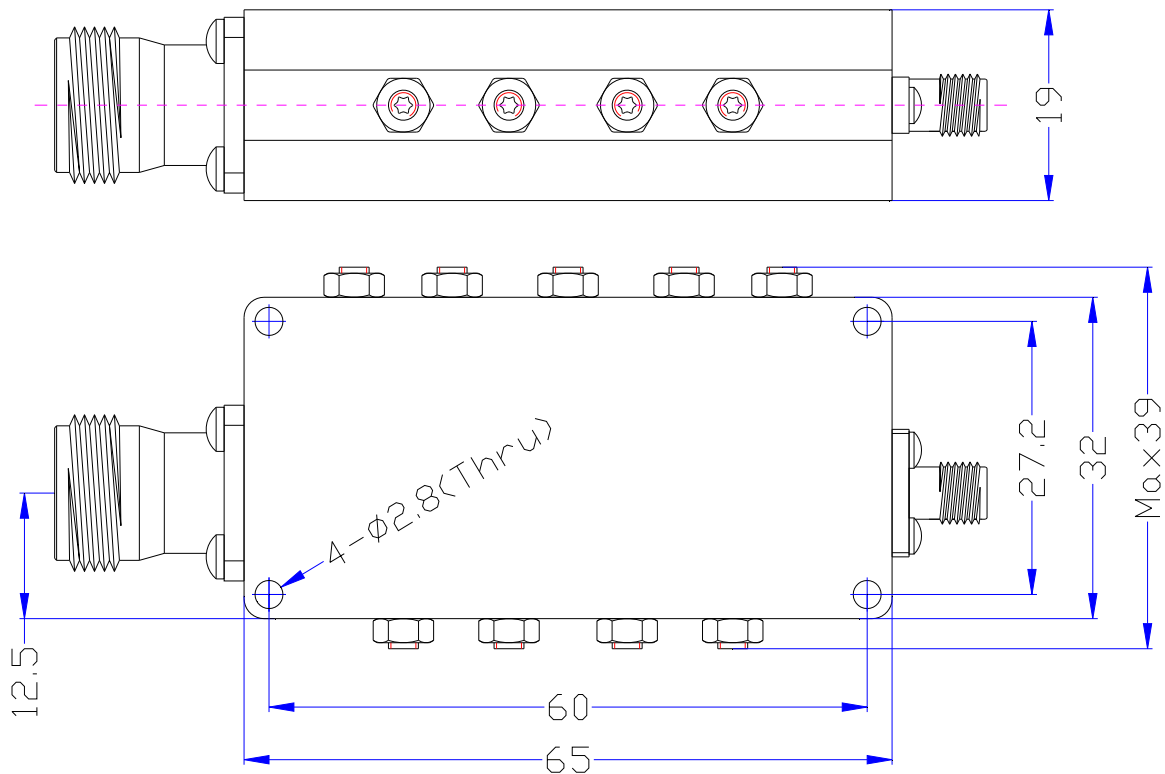

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051