


WT-A3596-Q15

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	3700MHz
2	Pass Band Frequency	3600~3800MHz
3	Pass Band Insertion Loss	≤3.0dB
4	Pass Band VSWR	≤1.5:1
5	Stop Band Rejection	≥50dB @ 3400~3560MHz ≥80dB @ 3400MHz
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤10W
9	Connectors	N-Female
10	Waterproof	IP67
11	Net Weight	0.855 KG
12	Configuration	As Below (Size Unit: mm)

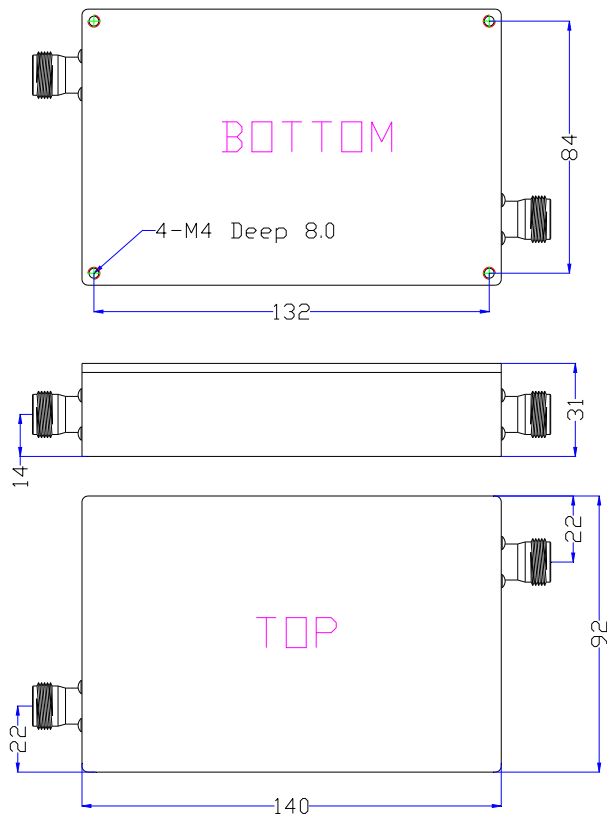

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051