


WT-A3614-Q07

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	39.3GHz
2	Pass Band Frequency	38.6~40GHz
3	Pass Band Insertion Loss	≤1.8dB
4	Pass Band VSWR	≤1.5:1
5	Stop Band Rejection	≥40dB @ F0±2.0GHz (37.3GHz、41.3GHz)
6	Impedance	50 ohms
7	Power Handling	≤5W
8	Connectors	2.92mm-Female
9	Surface Finish	Black Paint
10	Temperature Range	-30℃ ~ +70℃
11	Net Weight	0.035 KG
12	Configuration	As Below (Size Unit: mm)

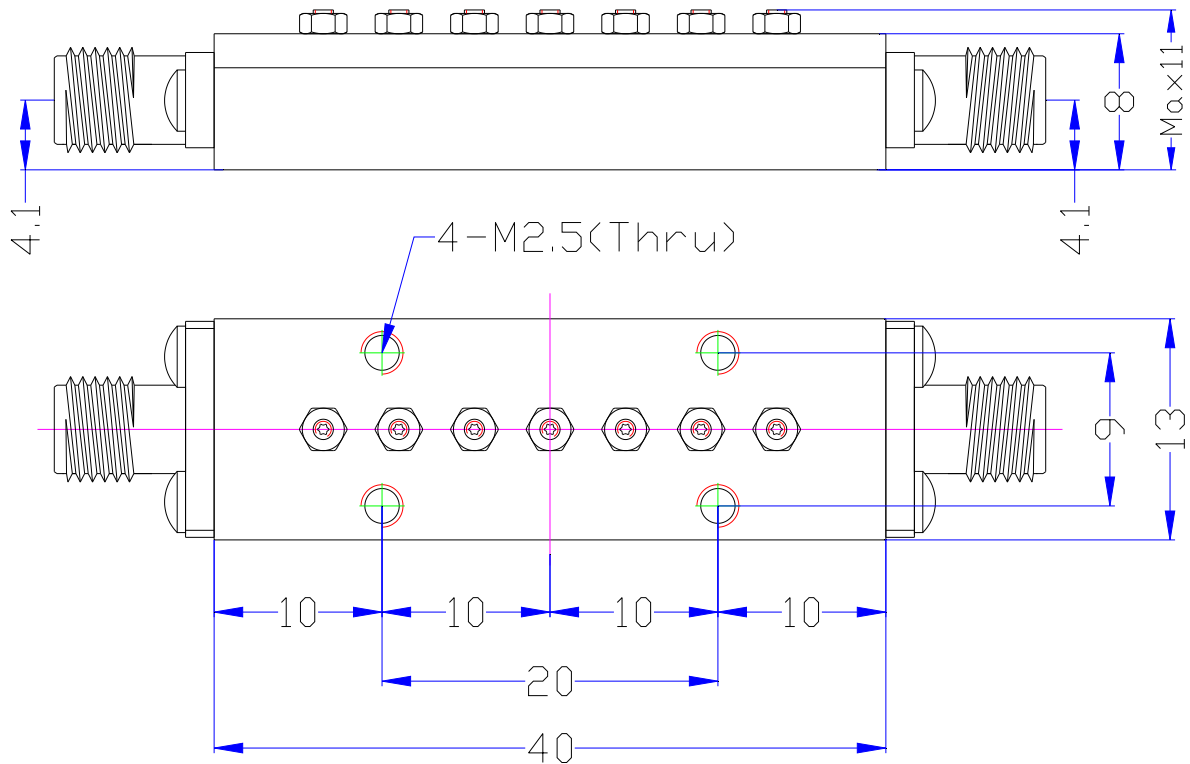

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051