


WT-A3626-R06

Cavity Notch Filter

Specifications

Serial	Parameters	
1	Stop Band Center Frequency	1030MHz
2	Stop Band Bandwidth	±2MHz (1028~1032MHz)
3	Stop Band Attenuation	≥20dB
4	Pass Band Frequency	0~1020MHz & 1040~3000MHz
5	Pass Band Insertion Loss	≤1.5dB
6	Pass Band VSWR	≤1.5:1
7	Impedance	50 ohms
8	Power Handling	≤10W
9	Connectors	N-Female
10	Surface Finish	Black Paint
11	Operating Temperature	0°C ~ +40°C
12	Net Weight	0.595 KG
13	Configuration	As Below (Size Unit: mm)

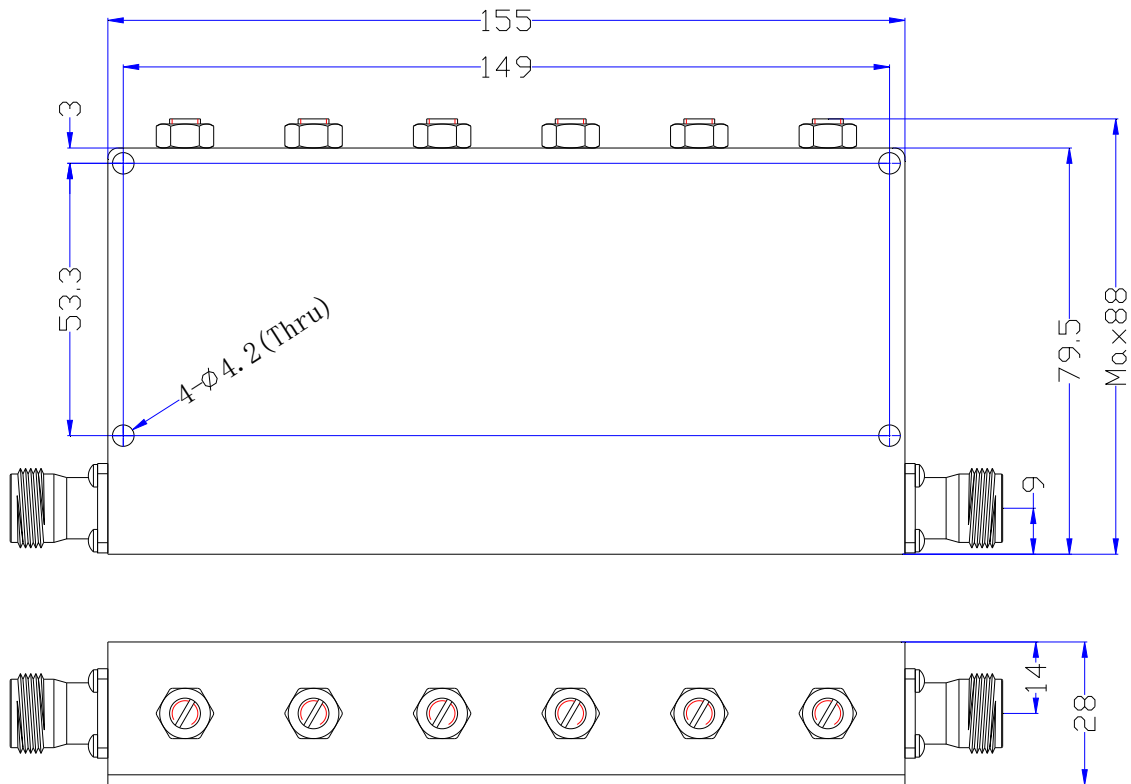

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051