


WT-A3627-Q08

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	435MHz
2	Pass Band Frequency	± 10MHz (425~445MHz)
3	Pass Band Insertion Loss	≤2.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥60dB @ DC~400MHz ≥60dB @ 460~800MHz
6	Impedance	50 ohms
7	Power Handling	≤20W
8	Connectors	SMA-Female
9	Temperature Range	-20℃~+60℃
10	Surface Finish	Black Paint
11	Net Weight	0.675 KG
12	Configuration	As Below (Size Unit: mm)

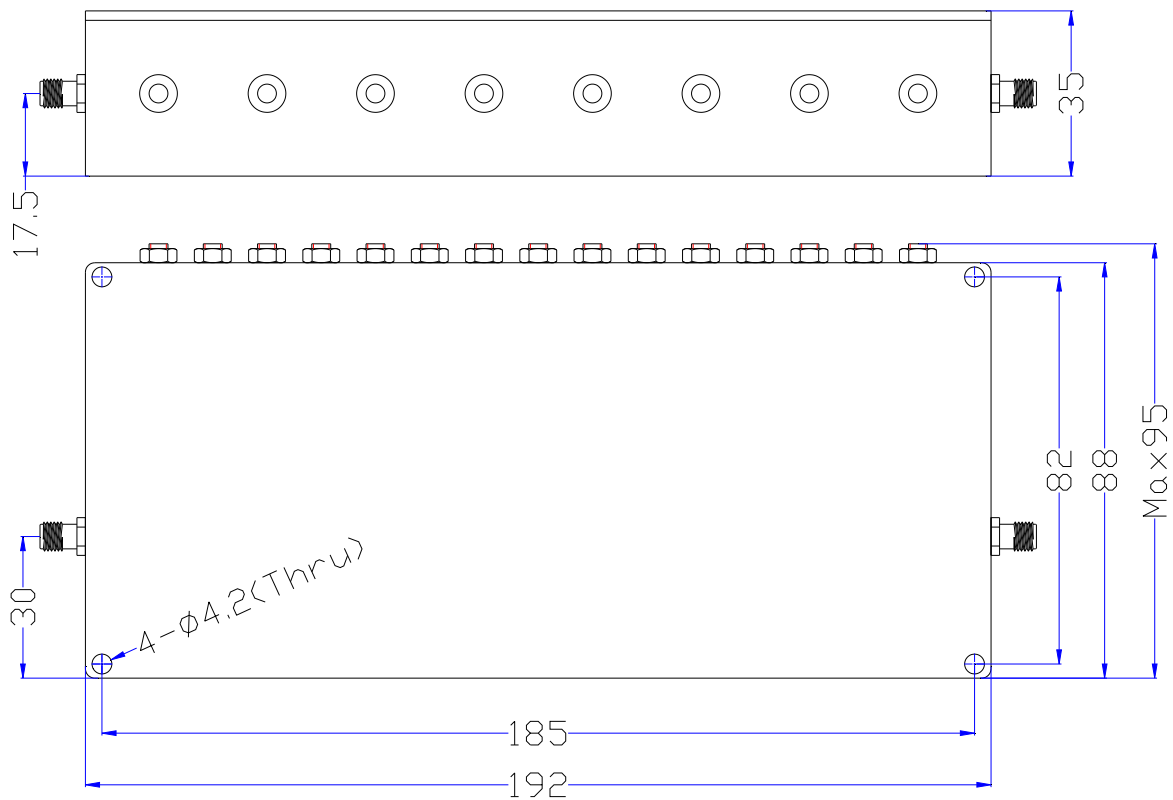

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051