


WT-A3629-J15

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	8.0GHz
2	Pass Band Frequency	6.0~10GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.6:1
5	Stop Band Rejection	≥60dB @ DC~5.2GHz ≥60dB @ 10.8~13GHz
6	Impedance	50 ohms
7	Power	≤2W
8	Surface Finish	The Original Silver Color or Black Paint
9	Connectors	SMA-Female
10	Temperature Range	-40°C ~ +70°C
11	Net weight	0.05 KG
12	Configuration	As Below (Size Unit: mm)

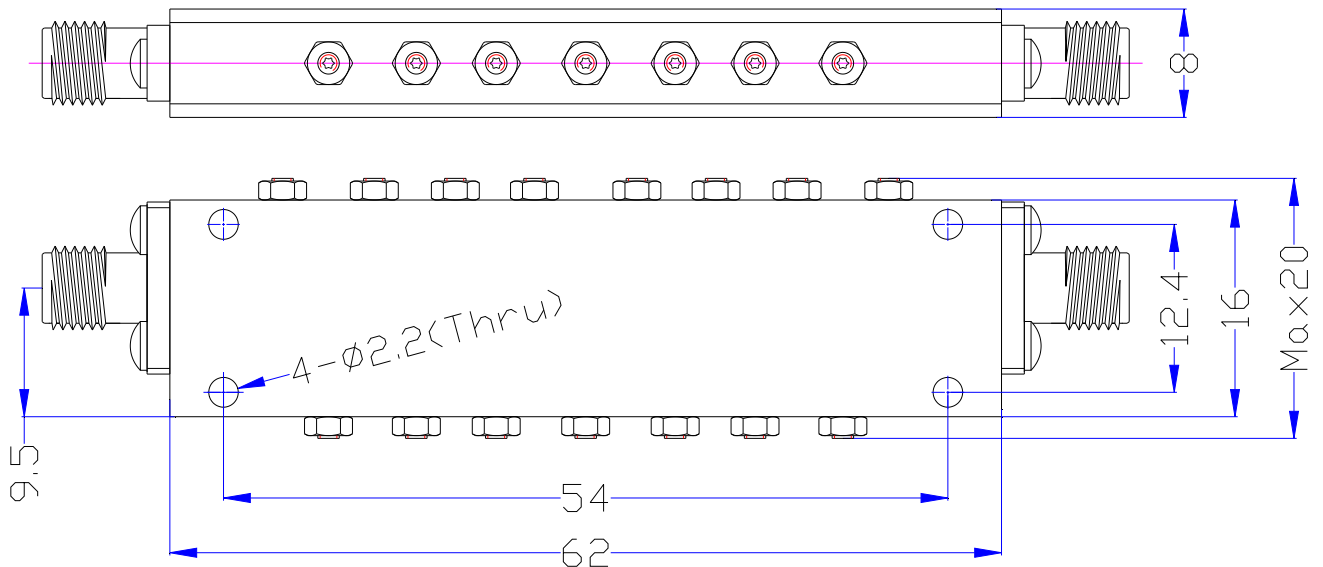

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051