


WT-A3677-R08

Cavity Band Rejection Filter

Specifications

Serial	Parameters	
1	Stop Band Frequency	922~928MHz
2	Stop Band Attenuation	≥40dB
3	Pass Band Frequency	DC~915MHz & 935~2590MHz
4	Pass Band Insertion Loss	≤1.0dB @ DC~905MHz & 945~2590MHz ≤2.5dB @ 905~915MHz & 935~945MHz
5	Pass Band VSWR	≤1.5:1
6	Impedance	50 ohms
7	Power Handling	≤50W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Net Weight	0.715 KG
11	Configuration	As Below (Size Unit: mm)

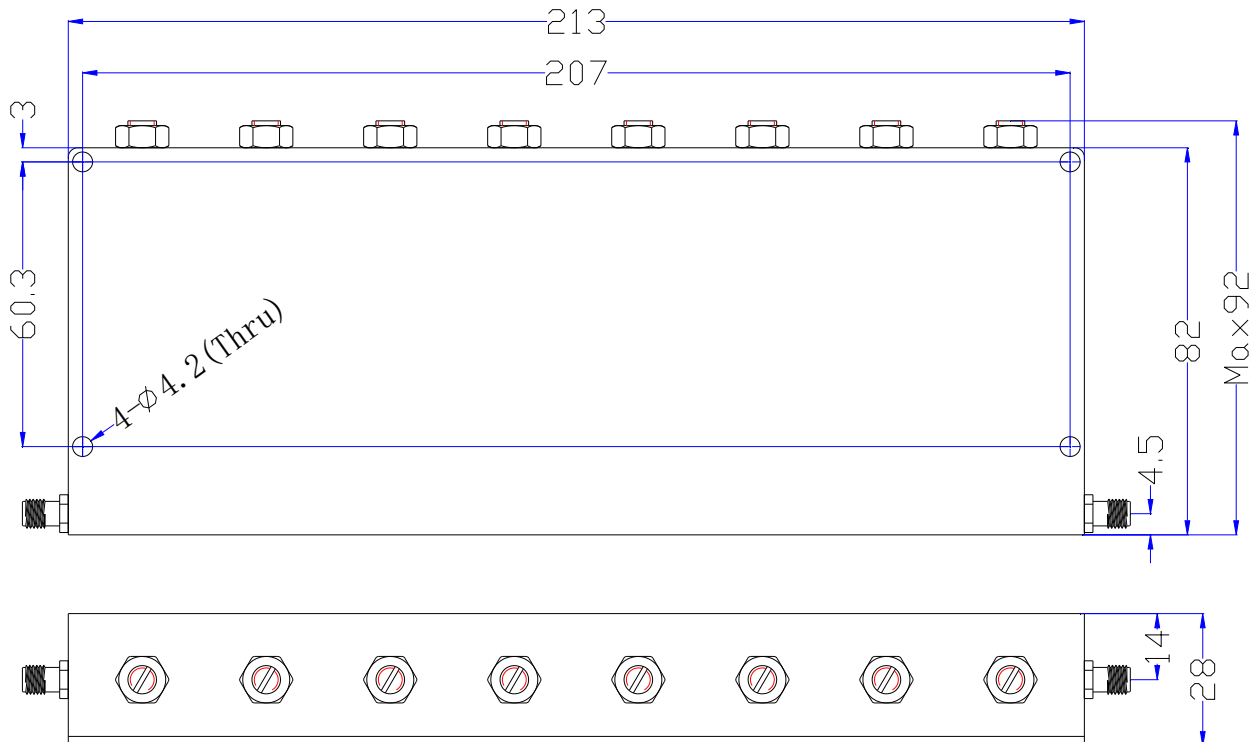

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051