


# WT-A3684-J15

## Interdigital Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	4.5GHz
2	Pass Band Frequency	3.0~6.0GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.7:1
5	Stop Band Rejection	≥40dB @ DC~2.5GHz ≥40dB @ 6.5~8.0GHz
6	Impedance	50 ohms
7	Power	≤2W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-40°C ~ +80°C
11	Net weight	0.07 KG
12	Configuration	As Below (Size Unit: mm)

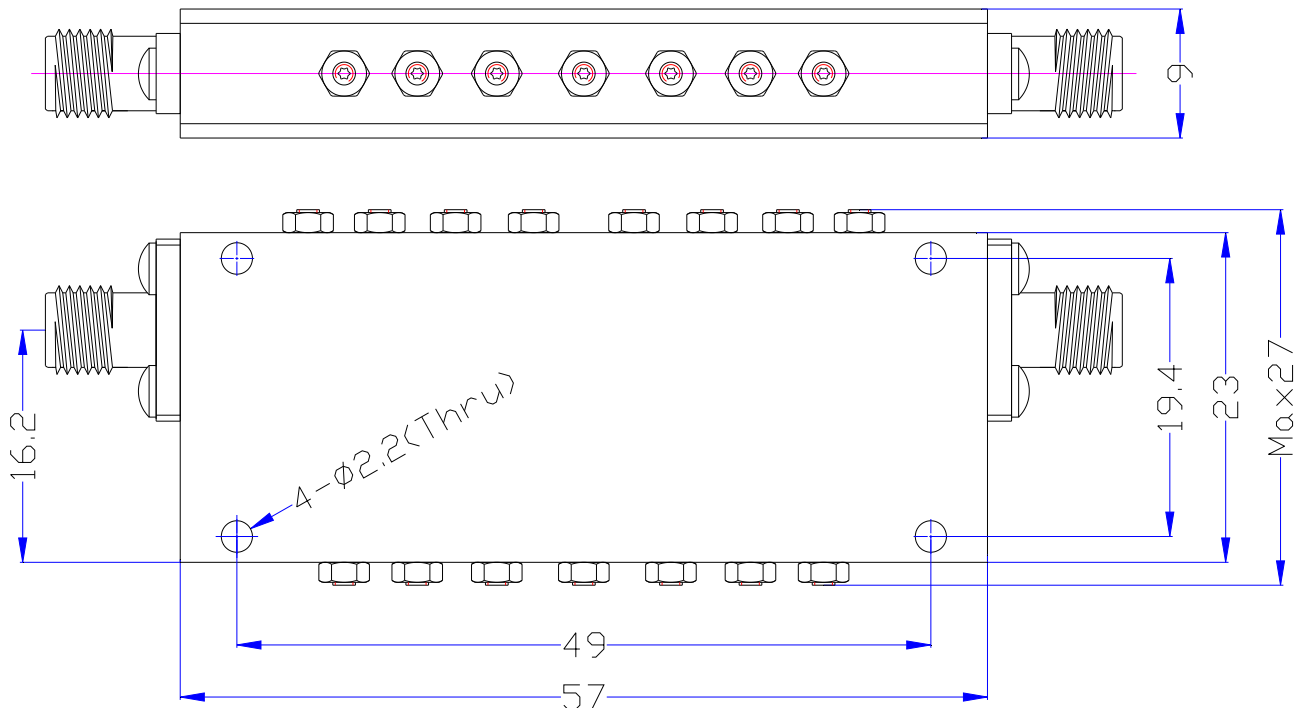

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051