


# WT-A3882-R10

## Cavity Band Rejection Filter

### Specifications

Serial	Parameters	
1	Stop Band Frequency	2.4~2.4835GHz
2	Stop Band Attenuation	≥50dB
3	Pass Band Frequency	1MHz~2.375GHz & 2.51~6.0GHz
4	Pass Band Insertion Loss	≤2.0dB
5	Pass Band Return Loss	≥12dB
6	Impedance	50 ohms
7	Power Handling	≤20W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Net Weight	0.33 KG
11	Configuration	As Below (Size Unit: mm)

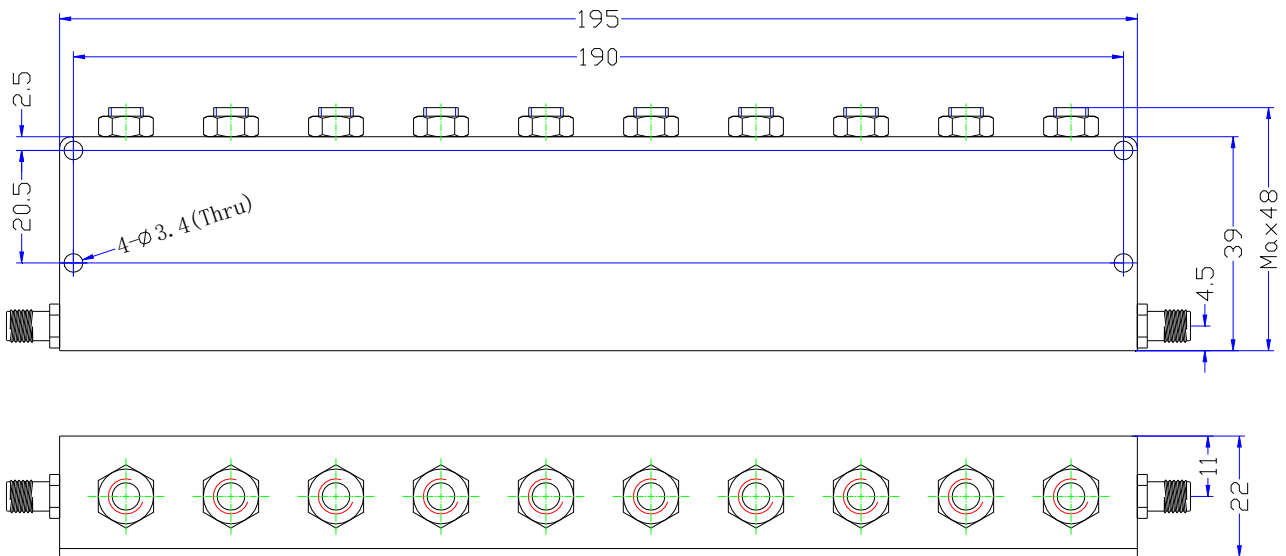

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051