


WT-A4468-Q05

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency [F0]	9.4GHz
2	Operating Frequency	9.3~9.5GHz
3	Insertion Loss	≤1.5dB
4	Ripple in Band	≤0.5dB
5	VSWR	≤1.3:1
6	Rejection	≥70dB @ DC~8.5GHz ≥70dB @ 10.3~18GHz
7	Power	≤5W
8	Impedance	50 ohms
9	Connectors	Needle (ø0.5*2mm) SMA-Female (Removable)
10	Surface Finish	The Original Silver Color
11	Temperature Range	-40℃~+85℃
12	Net Weight	0.05 KG
13	Configuration	As Below (Size Unit: mm)

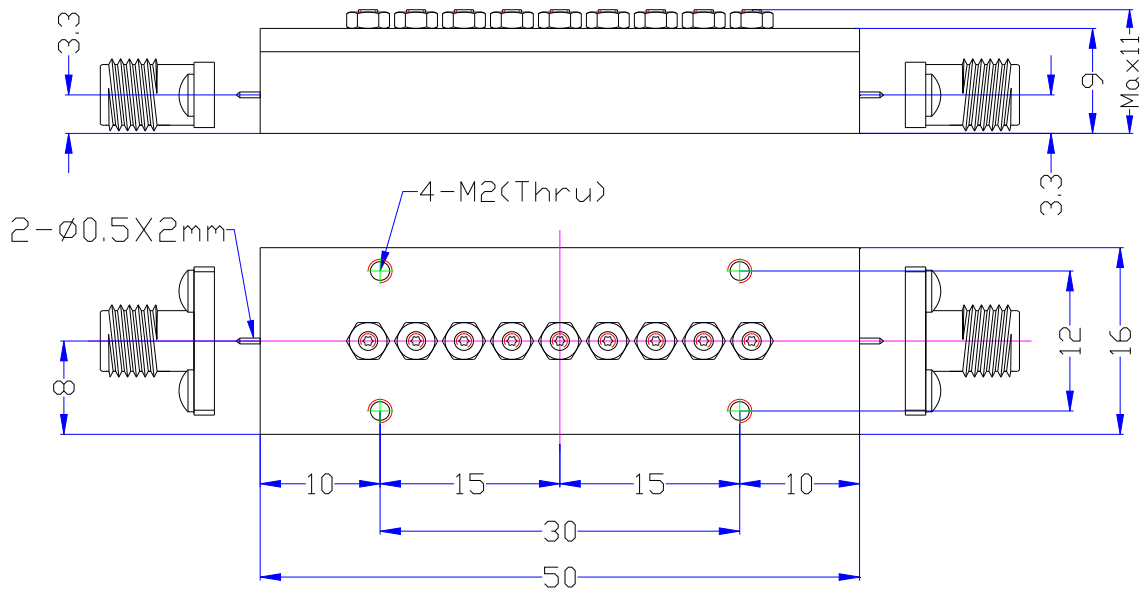

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051