


WT-A4478-J09

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	7.8GHz
2	Pass Band Bandwidth	1000MHz (7.3~8.3GHz)
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.5:1
5	Stop Band Attenuation	≥50dB @ F0±1000MHz (DC~6.8GHz、8.8~12GHz)
6	Impedance	50 ohms
7	Power Handling	≤2W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-30℃ ~ +70℃
11	Net Weight	0.04 KG
12	Configuration	As Below (Size Unit: mm)

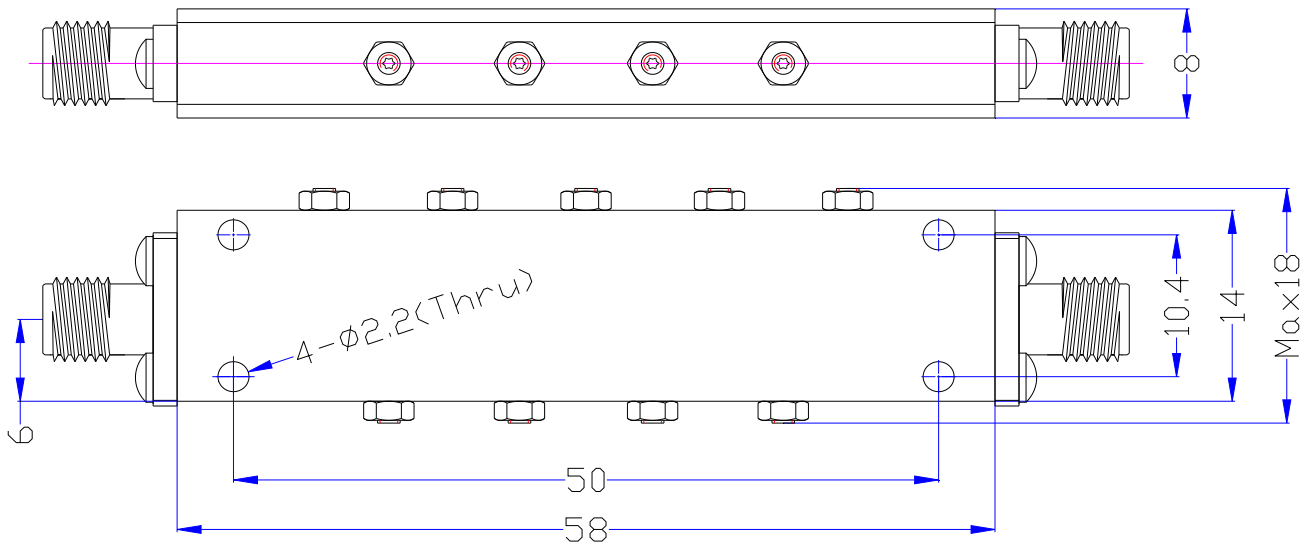

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051