


WT-A4587-Q08

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	25.875GHz
2	Pass Band Bandwidth	3.25GHz (24.25~27.5GHz)
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band Return Loss	≥15dB
5	Stop Band Attenuation	≥30dB @ 22.75GHz ≥30dB @ 29GHz
6	Impedance	50 ohms
7	Power Handling	≤10W
8	Connectors	2.92mm(K)-Female
9	Operating Temperature	-30℃~+70℃
10	Surface Finish	Black Paint
11	Net Weight	0.045 KG
12	Configuration	As Below (Size Unit: mm)

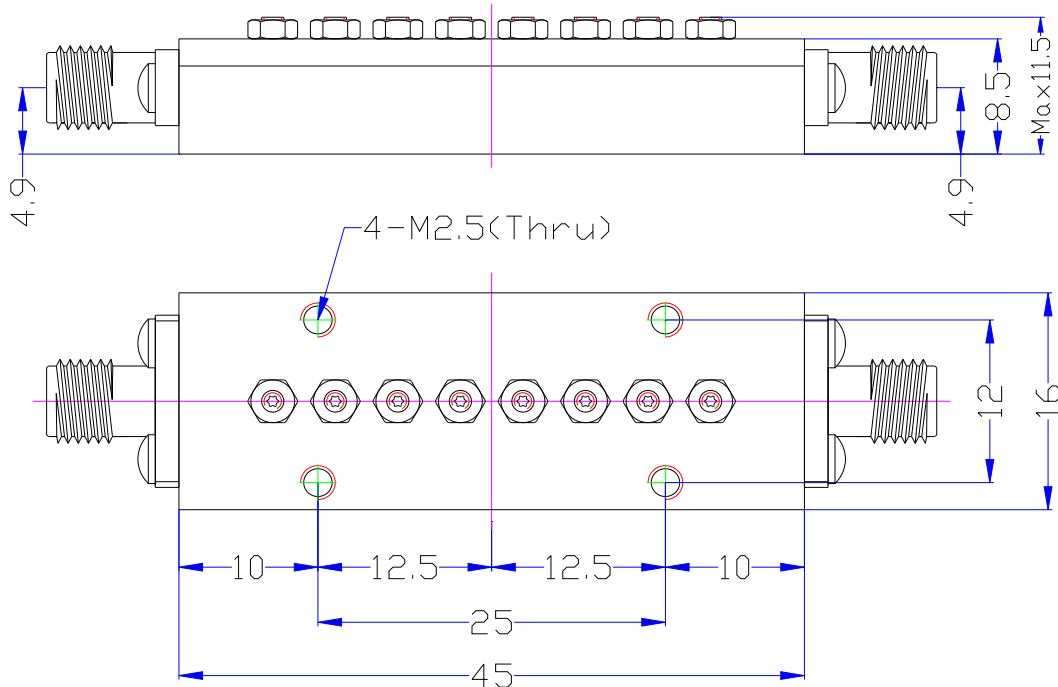

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051