


WT-A4635-R09

Cavity Band Rejection Filter

Specifications

Serial	Parameters	
1	Stop Band Frequency	824~846MHz
2	Stop Band Attenuation	≥45dB
3	Pass Band Frequency	DC~790MHz & 866~2500MHz
4	Pass Band Insertion Loss	≤2.0dB
5	Pass Band VSWR	≤1.5:1 @ DC~790MHz & 866~2200MHz ≤1.8:1 @ 2200~2500MHz
6	Impedance	50 ohms
7	Power Handling	≤20W
8	Connectors	N-Female
9	Surface Finish	Black Paint
10	Temperature Range	-10℃ ~ +50℃
11	Net Weight	0.975 KG
12	Configuration	As Below (Size Unit: mm)

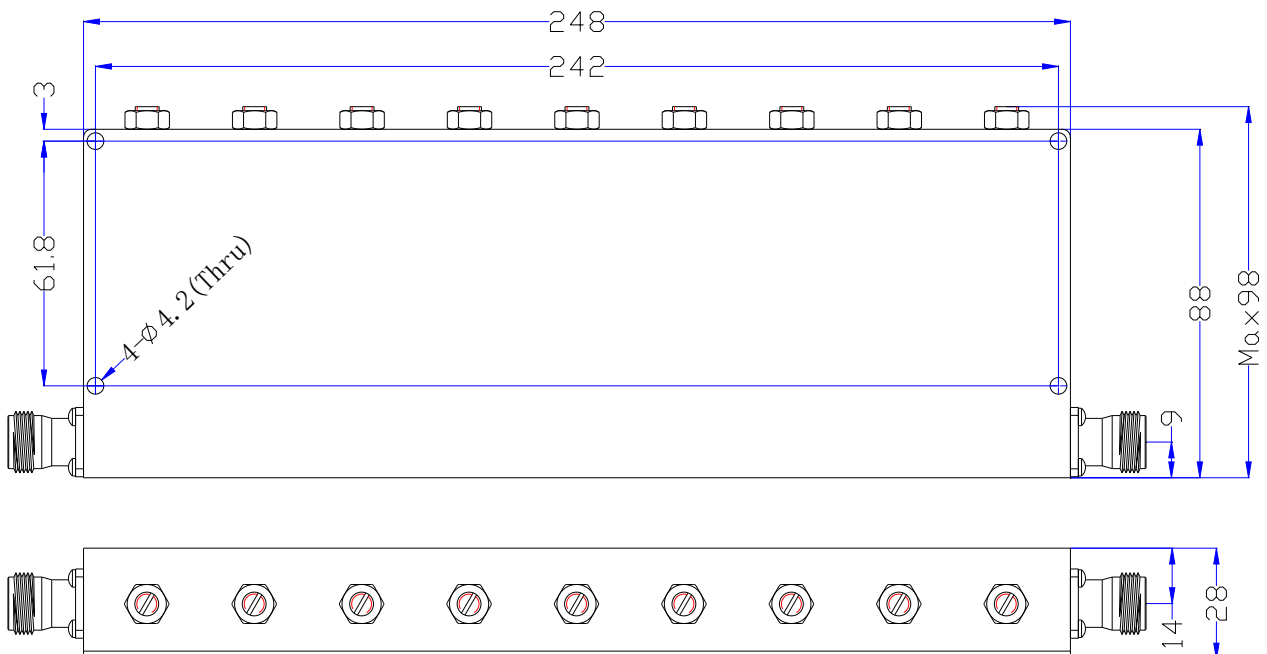

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL: +86-28-84300332/84300037 FAX: +86-28-84300332-807

Add: Chengdu of China Zip Code: 610051