


WT-A4675-Q03

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	7247.5MHz
2	Pass Band Frequency	7246~7249MHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Attenuation	≥35dB @ 8025~8055MHz
6	Impedance	50 ohms
7	Power Handling	≤5W
8	Connectors	SMA-Female
9	Operating Temperature	-30°C ~ +70°C
10	Surface Finish	Black Paint
11	Net Weight	0.04 KG
12	Configuration	As Below (Size Unit: mm)

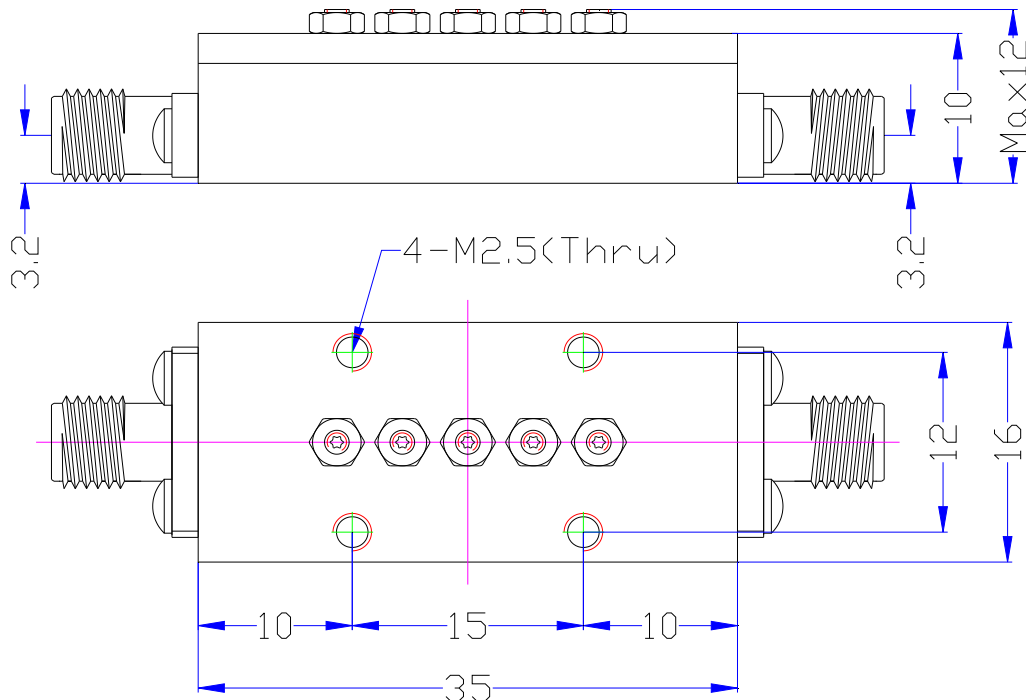

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL: +86-28-84300332/84300037 FAX: +86-28-84300332-807

Add: Chengdu of China Zip Code: 610051