


WT-A4737-J11

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	12.7GHz
2	Pass Band Frequency	10.9~14.5GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.7:1
5	Stop Band Rejection	≥54dB @ 5.2GHz ≥47dB @ 9.7GHz ≥52dB @ 17GHz ≥60dB @ 18GHz
6	Impedance	50 ohms
7	Power Handling	≤2W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-40℃ ~ +70℃
11	Net Weight	0.03 KG
12	Configuration	As Below (Size Unit: mm)

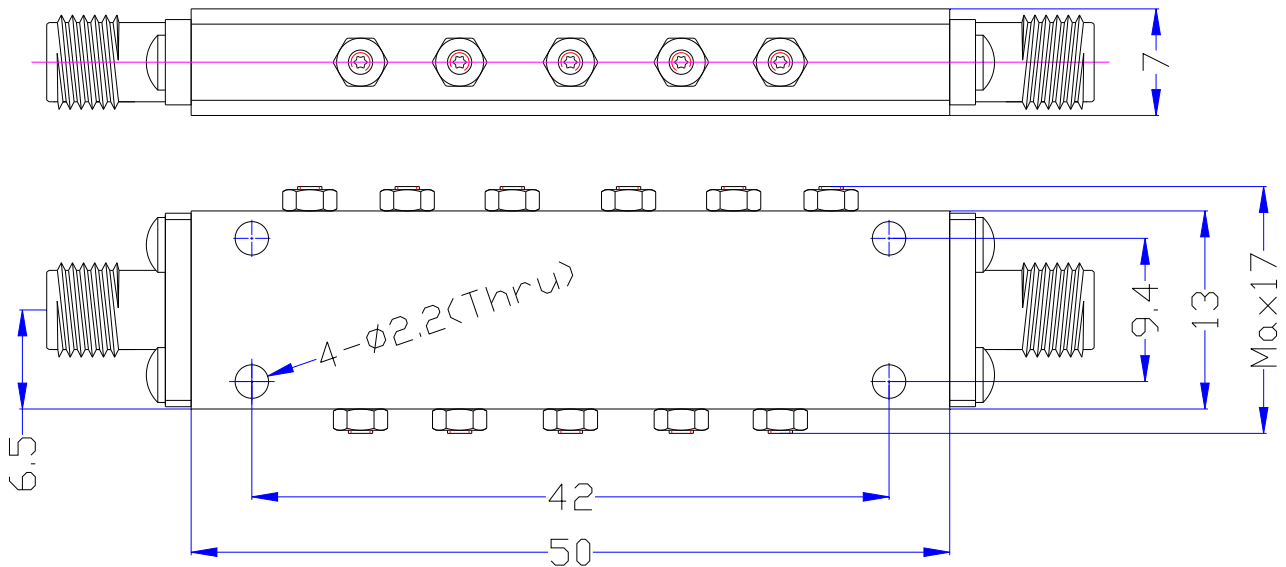

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL: +86-28-84300332/84300037 FAX: +86-28-84300332-807

Add: Chengdu of China Zip Code: 610051