


## WT-A4765-Q05

### Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency (F0)	11.705GHz
2	Pass Band Frequency	11.605~11.805GHz
3	Pass Band Insertion Loss	≤1.5dB
4	Pass Band VSWR	≤1.5:1
5	Stop Band Rejection	≥60dB @ DC~10.705GHz ≥60dB @ 12.705~14GHz
6	Impedance	50 ohms
7	Power Handling	≤5W
8	Connectors	SMA-Female
9	Operating Temperature	-20°C~+60°C
10	Surface Finish	Black Paint
11	Net Weight	0.035 KG
12	Configuration	As Below (Size Unit: mm)

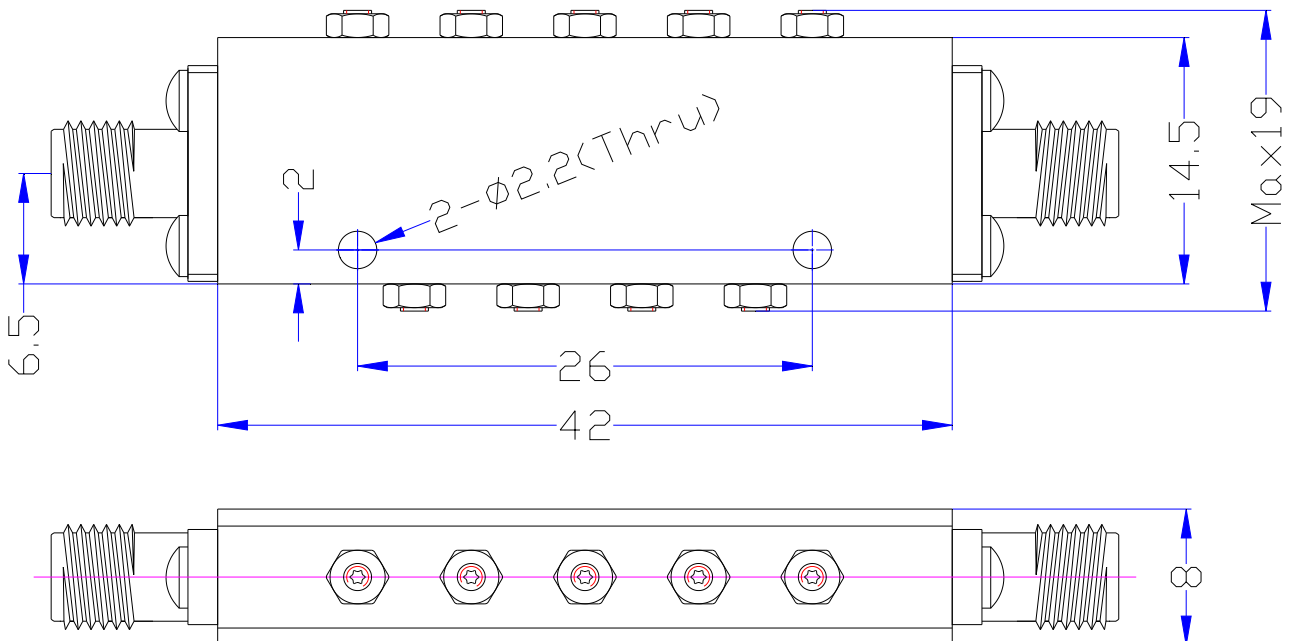

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051