


WT-A4791-Q13

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	13625MHz
2	Pass Band Frequency	12750~14500MHz
3	Insertion Loss at F0	≤1.0dB @ 13625MHz
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥50dB @ DC~12350MHz ≥50dB @ 14900~20000MHz
6	Impedance	50 ohms
7	Power Handling	≤5W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-30°C ~ +70°C
11	Net Weight	0.095 KG
12	Configuration	As Below (Size Unit: mm)

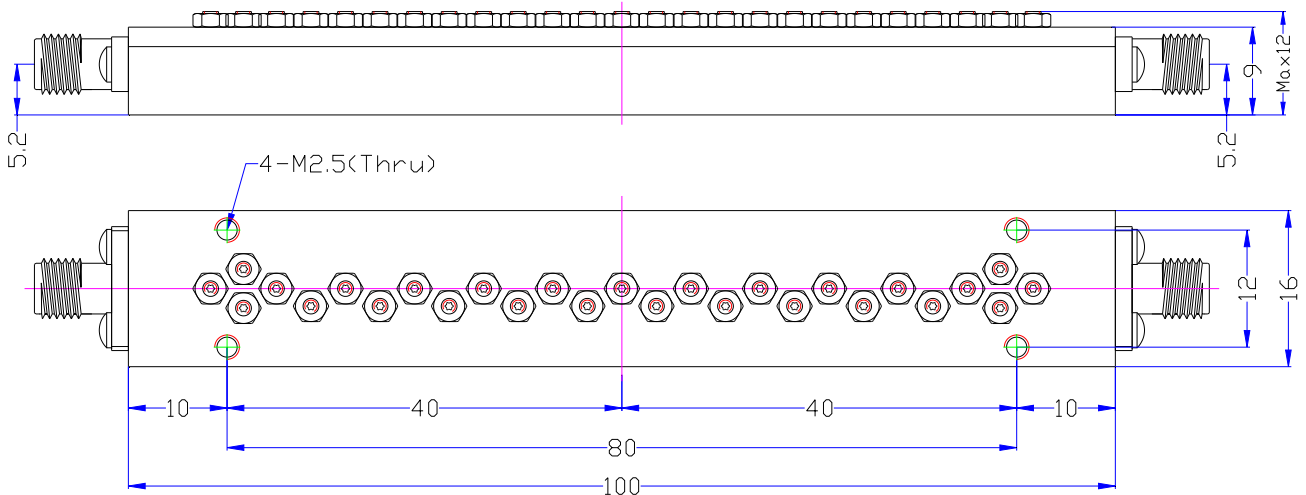

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051