


WT-A4805-Q12

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	1472MHz
2	Pass Band Frequency	1452~1492MHz
3	Pass Band Insertion Loss	≤3.5dB
4	Pass Band VSWR	≤1.4:1
5	Stop Band Rejection	≥40dB @ DC~1449.5MHz ≥40dB @ 1494.5~3000MHz
6	Impedance	50 ohms
7	Input Power	≤20W
8	Connectors	N-Female
9	Surface Finish	Black Paint
10	Temperature Range	-10°C ~ +50°C
11	Net Weight	0.735 KG
12	Configuration	As Below (Size Unit: mm)

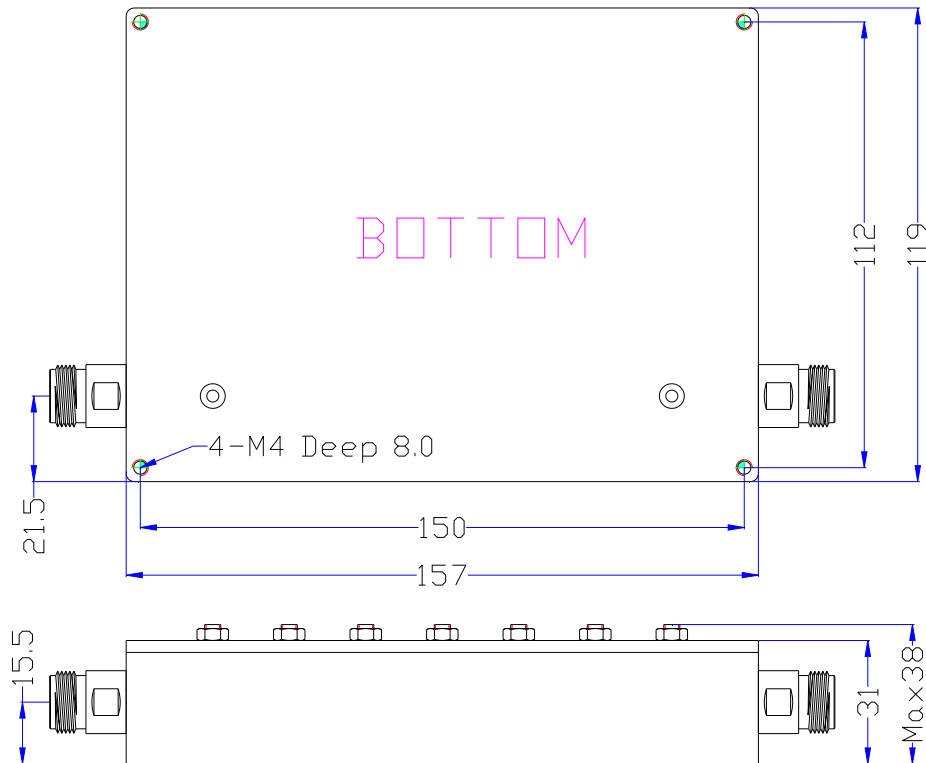

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL: +86-28-84300332/84300037 FAX: +86-28-84300332-807

Add: Chengdu of China Zip Code: 610051