


WT-A4849-Q07

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	10GHz
2	Pass Band Frequency	9.5~10.5GHz
3	Pass Band Insertion Loss	≤0.6dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥25dB @ DC~8.0GHz ≥25dB @ 12~19GHz
6	Impedance	50 ohms
7	Power Handling	≤5W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Operating Temperature	-30℃~+70℃
11	Net Weight	0.055 KG
12	Configuration	As Below (Size Unit: mm)

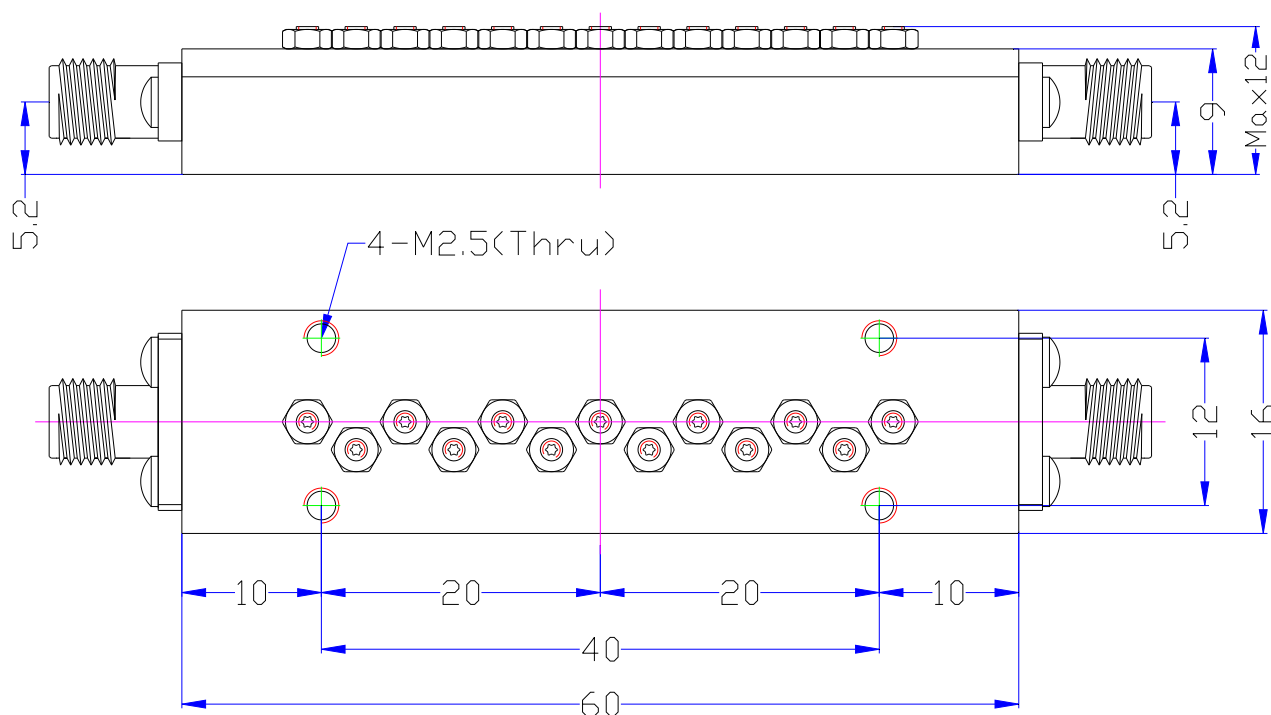

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051