


WT-A4879-Q08

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	5275MHz
2	Pass Band Frequency	5150~5400MHz
3	Pass Band Insertion Loss	≤2.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥40dB @ DC~5000MHz ≥40dB @ 5550~12000MHz
6	Impedance	50 ohms
7	Power Handling	≤10W
8	Connectors	N-Male / N-Female
9	Surface Finish	Black Paint
10	Temperature Range	-30°C ~ +70°C
11	Net Weight	0.145 KG
12	Configuration	As Below (Size Unit: mm)

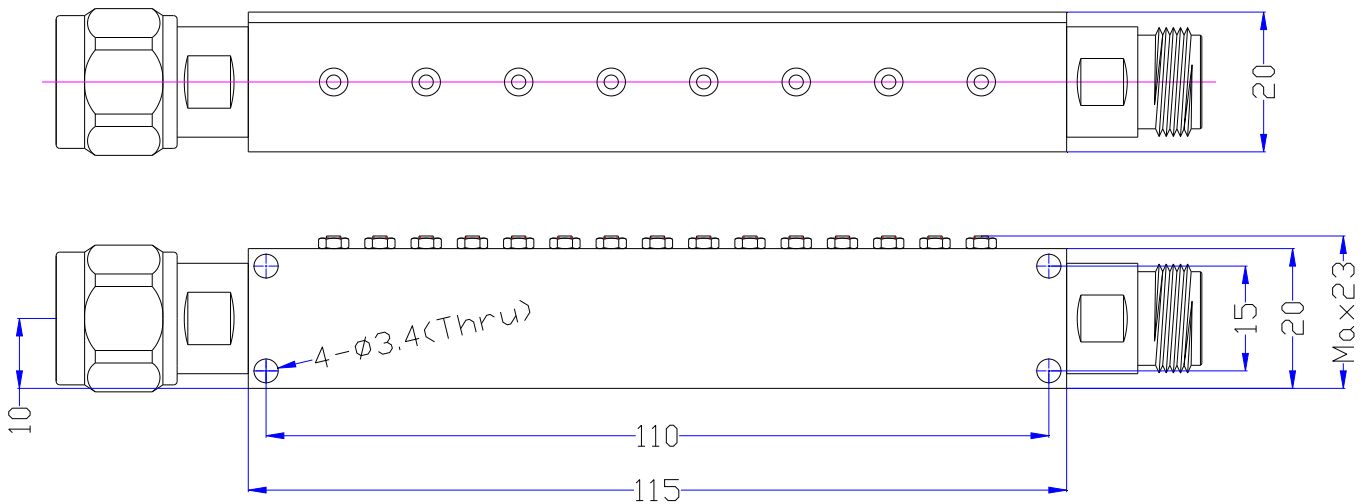

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL: +86-28-84300332/84300037 FAX: +86-28-84300332-807

Add: Chengdu of China Zip Code: 610051