WT-A4882-Q12

Cavity Band Pass Filter

Specifications
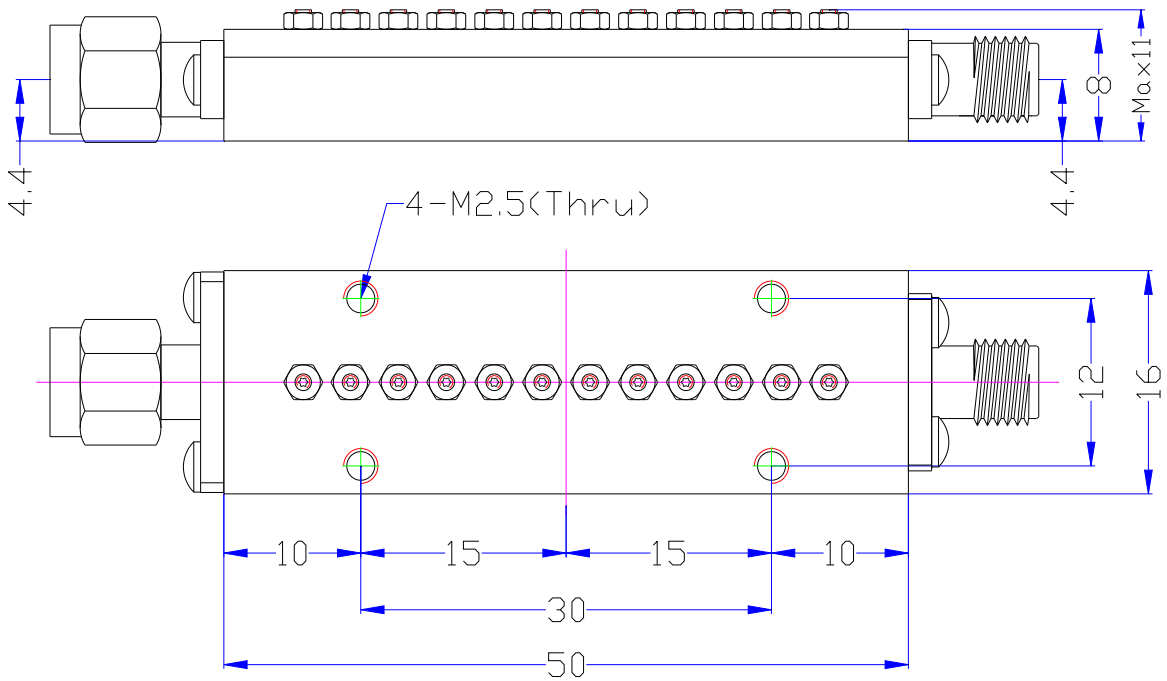
Serial	Parameters	
1	Center Frequency (F0)	39.5GHz
2	Pass Band Frequency	37～42GHz
3	Pass Band Insertion Loss	≤1.8dB
4	Pass Band VSWR	≤1.5:1
5	Stop Band Rejection	≥60dB @ DC～35.4GHz ≥55dB @ 43.6～50GHz
6	Impedance	50 ohms
7	Power Handling	≤5W
8	Connectors	Input: 2.92mm(K)-Male Output: 2.92mm(K)- Female
9	Surface Finish	Black Paint
10	Temperature Range	-30℃～+70℃
11	Net Weight	0.05 KG
12	Configuration	As Below (Size Unit: mm)