


# WT-A0679-S10

## Comb Band Pass Filter

### Specifications

| Serial | Parameters                         |   |
|--------|------------------------------------|---|
| 1      | Center Frequency (F0)              | 2300MHz                                   |
| 2      | 3dB Bandwidth                      | ≈200MHz (≈2200~2400MHz)                   |
| 3      | Insertion Loss at Center Frequency | ≤2.0dB@2300MHz                            |
| 4      | VSWR                               | ≤1.5:1 @ 160MHz Bandwidth (2220~2380MHz)  |
| 5      | Rejection                          | ≥70dB@ 500~2075MHz<br>≥70dB@ 2525~6000MHz |
| 6      | Impedance                          | 50 ohms                                   |
| 7      | Surface Finish                     | The Original Silver Color                 |
| 8      | Power Handling                     | 10W                                       |
| 9      | Connectors                         | SMA-Female                                |
| 10     | Net Weight                         | 0.065 KG                                  |
| 11     | Configuration                      | As Below (Size Unit: mm)                  |

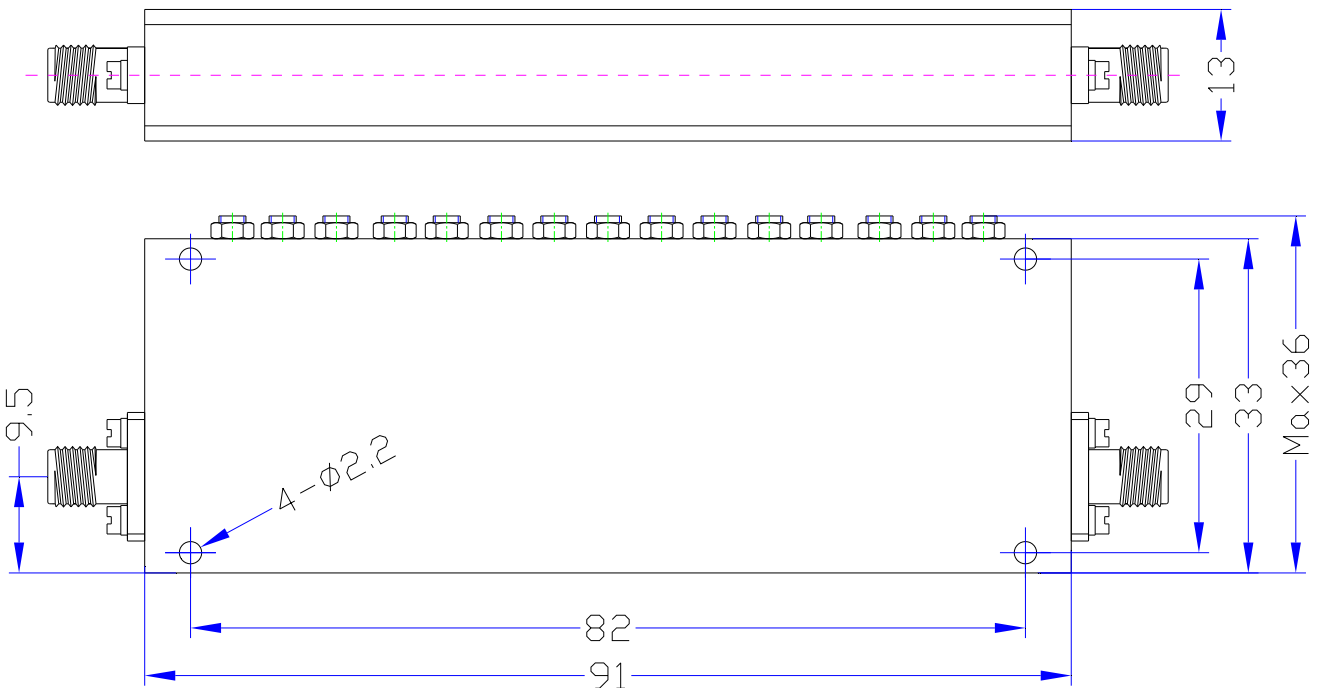

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051